

# MINO 40 reflector

ceiling / suspended system


042-0111137R 042-1002018



Project / Type

Notes

Count / Date

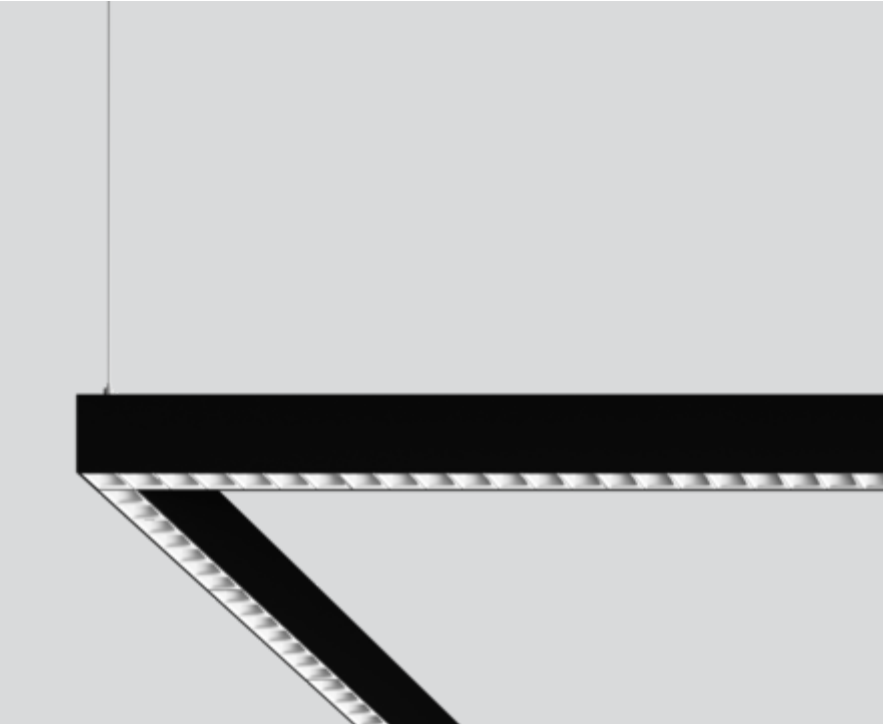

### General

Ceiling , Suspended

black , RAL 9005 <sup>1</sup>

Reflector chrome

IP20

1630 lm

3270 lm/m

### LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 90

MR 0.81

MDER 0.74

### Optical

Reflector

symmetric

UGR < 19 , ≥65° <1500 cd/m<sup>2</sup>

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 12.2 W

system 134 lm/W<sup>3</sup>

PC1

1 DALI Addr.

24 W/m

### Physical


length 500 mm

width 40 mm


height 65 mm

5.5 kg

### Light distribution



### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

### Installation instructions



### Lighting calculator

