

MINO 40 reflector

ceiling / suspended system


042-0111137R 042-1002017



Project / Type

Notes

Count / Date

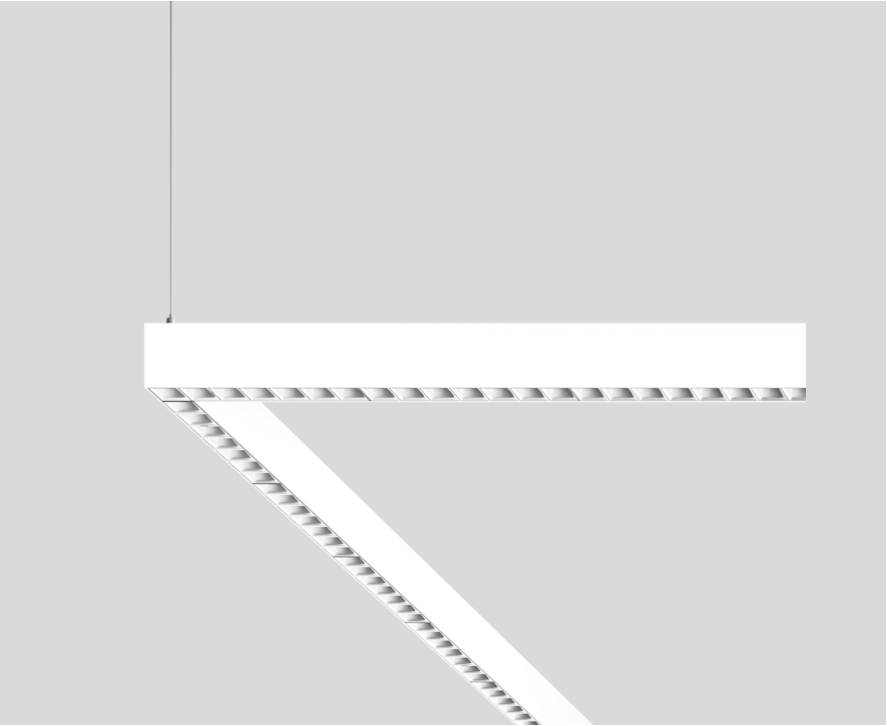

General

Ceiling , Suspended

RAL Pure white , RAL 9010 ¹

Reflector chrome

3270 lm/m

IP20

1630 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 92 , R_{t(1-5)}: 90

MR 0.81

MDER 0.74

Optical

Reflector

symmetric

UGR < 19 , ≥65° <1500 cd/m²

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 12.2 W

PC1 220-240V

system 134 lm/W³

1 DALI Addr.

24 W/m

Physical


length 500 mm

width 40 mm


height 65 mm

5.5 kg

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Lighting calculator

