


MINO 40 reflector

ceiling / suspended system

042-0111037B 042-100201W



Project / Type	
Notes	
Count / Date	

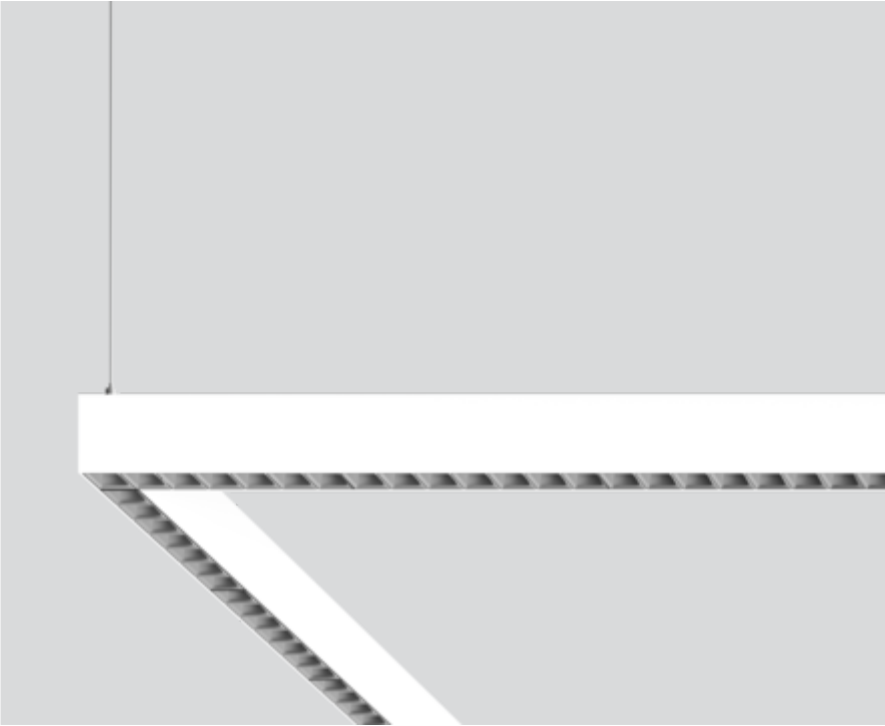

General

Ceiling , Suspended
RAL Traffic white , RAL 9016 ¹
Reflector dark chrome
IP20
1130 lm
2250 lm/m

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89
MR 0.61
MDER 0.55

Optical

Reflector
symmetric
UGR ≤ 19 , ≥65° <1500 cd/m ²
P _{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrical

DALI-2
220-240 V
system 12.2 W
system 93 lm/W ³
PC1
1 DALI Addr.
24 W/m

Physical

length 500 mm
width 40 mm
height 65 mm
5.5 kg

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

