


# MINO 40 reflector

ceiling / suspended system

042-0112037B 042-1002017



Project / Type	
Notes	
Count / Date	

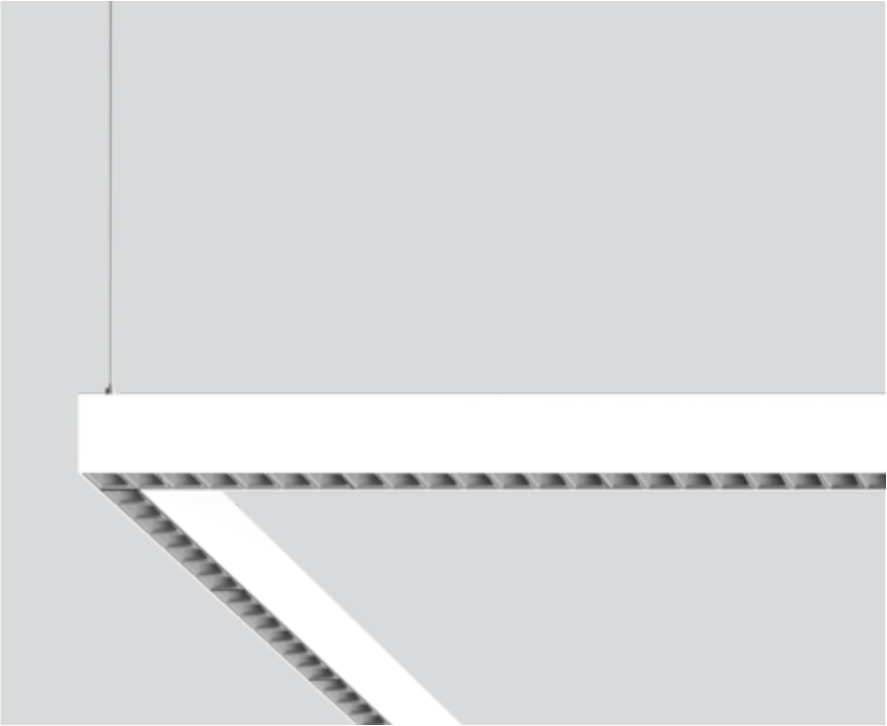

## General

Ceiling , Suspended
RAL Pure white , RAL 9010 <sup>1</sup>
Reflector dark chrome
IP20
2250 lm
2250 lm/m

## LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 99 , R <sub>f</sub> : 91 , R <sub>(1-15)</sub> : 89
MR 0.61
MDER 0.55

## Optical

Reflector
symmetric
UGR ≤ 19 , ≥65° <1500 cd/m <sup>2</sup>
P <sub>st</sub> LM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>


## Electrical

DALI-2
220-240 V
system 24.4 W
system 92 lm/W <sup>3</sup>
PC1
1 DALI Addr.
24 W/m



## Physical

length 1000 mm
width 40 mm
height 65 mm
5.5 kg

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

