

SQUADRO double-sided wallwasher

trim


049-2020218A



Project / Type


Notes

Count / Date

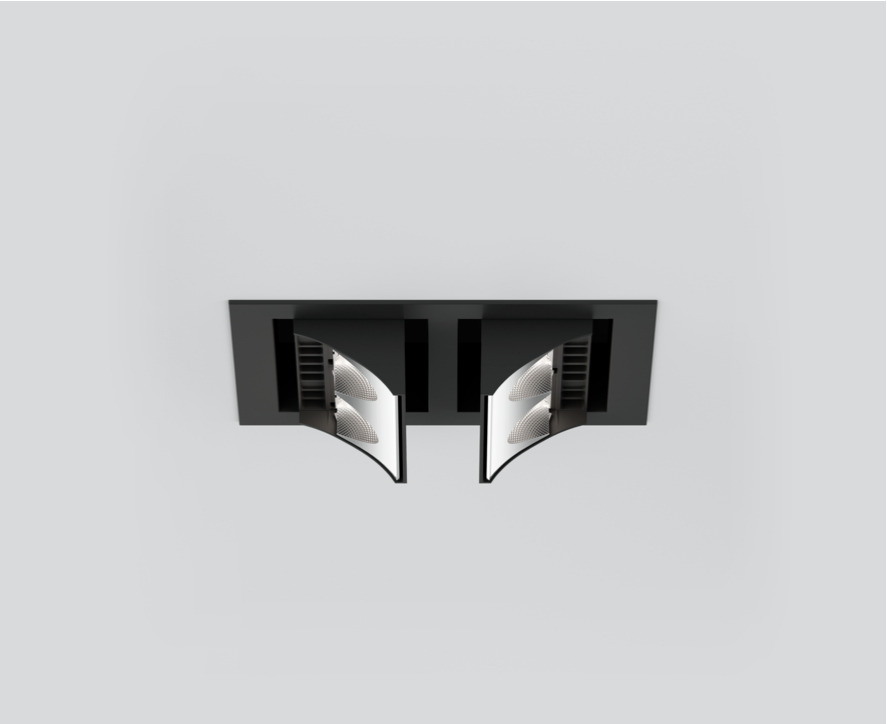

Recessed ceiling spotlight in die cast aluminium with 2x2-lamp design; surface black powder coated; with wrap around edge; suitable for ceiling thickness of 2-25 mm; installation without tools using snap spring closure; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; aisle spotlight wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable $+20^\circ$ to -10°); degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Recessed

tilt min -10°

tilt max 20°

black , RAL 9005 ¹

IP20

9770 lm

LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 93

MR 0.61

MDER 0.55

Optical

wall floor washer

PstLM $\leq 1.0^2$ ³

SVM $\leq 0.4^2$ ³

Electrical

non DIM

220-240 V

system 71 W

system 138 lm/W⁴

PC2

Physical

length 180 mm

width 209 mm

height 76 mm

Cutout

length 145 mm

width 190 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 85 mm

¹ RAL code ² double-sided
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



SQUADRO double-sided wallwasher

trim
049-2020218A



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.977 | 0.94 | 0.905 | 0.871 | 0.838 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 8 |
| B13 | 10 |
| B16 | 13 |
| B20 | 16 |
| C10 | 13 |
| C13 | 17 |
| C16 | 22 |
| C20 | 28 |

Optical accessories

IP40 PROTECTION GLASS

| | |
|----------------------------|-------------------|
| TYPE | ARTICLE NUMBER(S) |
| 2 x 2 lamps / double-sided | 049-2920010 |

