


# SQUADRO double-sided wallwasher

trim

049-2020217B




Project / Type	
Notes	
Count / Date	

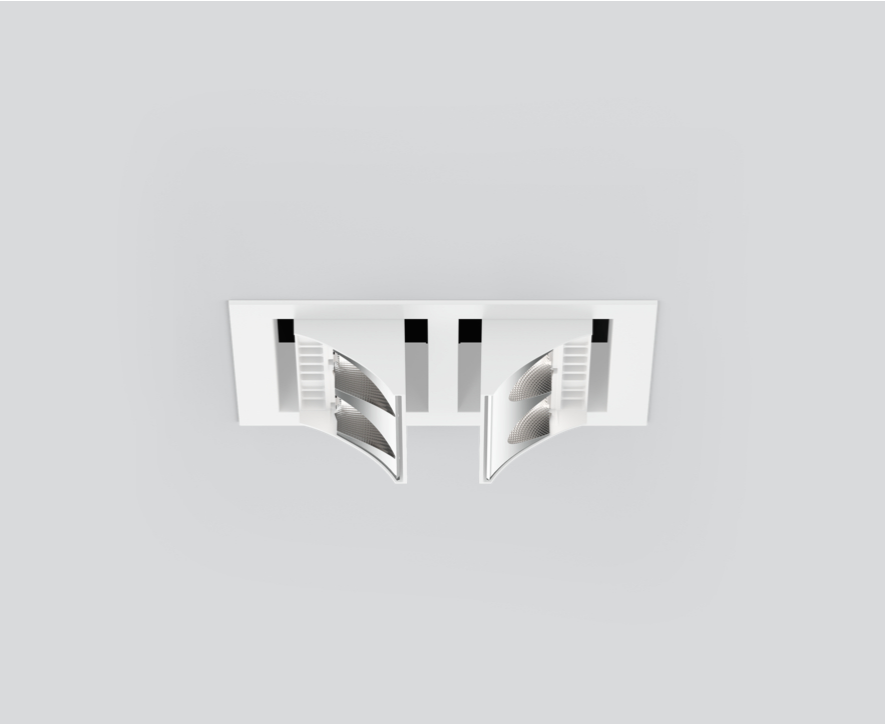


Recessed ceiling spotlight in die cast aluminium with 2x2-lamp design; surface white powder coated; with wrap around edge; suitable for ceiling thickness of 2-25 mm; installation without tools using snap spring closure; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; Aisle spotlight 1x shelf / 1x wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable +20° to -10°); degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

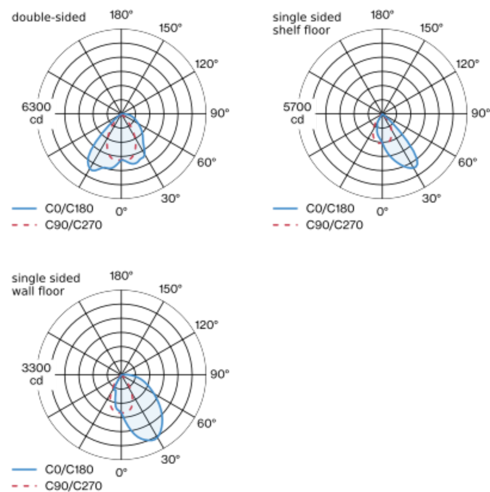

## Product drawing



## General

Ceiling , Recessed	
tilt min -10°	
tilt max 20°	
white , RAL9016 <sup>1</sup>	
IP20	
4880 <sup>2</sup> , 4880 <sup>3</sup> , 9770 <sup>4</sup> lm	

## LED

3500 K	
CRI $\geq 90$	
L80 / 50000 h	
initial MacAdam $\leq 2$ SDCM	
R <sub>g</sub> : 99 , R <sub>f</sub> : 92 , R <sub>t(1-5)</sub> : 93	
MR 0.61	
MDER 0.55	

## Optical

shelf / wall floor washer	
PstLM $\leq 1.0$ <sup>5</sup>	
SVM $\leq 0.4$ <sup>5</sup>	

## Electrical

non DIM	
220-240 V	
system 36 <sup>2</sup> , 36 <sup>3</sup> , 71 <sup>4</sup> W	
PC2	
system 136 <sup>2</sup> , 136 <sup>3</sup> , 138 <sup>4</sup> lm/W <sup>6</sup>	

## Physical

length 180 mm	
width 209 mm	
height 76 mm	

## Cutout

length 145 mm	
width 190 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 85 mm	

<sup>1</sup> RAL code <sup>2</sup> single sided wall floor <sup>3</sup> single sided shelf floor  
<sup>4</sup> double-sided  
<sup>5</sup> Value of containing product at full load (undimmed)  
<sup>6</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions

