

# TWIST 100 trim 2 lamps

048-1121118S 048-2798318 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



**General**

Ceiling , Recessed \_\_\_\_\_

tilt max 45° \_\_\_\_\_

rotation 360° \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

front IP20 , back IP20 \_\_\_\_\_

6280 lm \_\_\_\_\_

**LED**

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(1-15)</sub>: 91 \_\_\_\_\_

MR 0.78 \_\_\_\_\_

MDER 0.71 \_\_\_\_\_

**Optical**

spot \_\_\_\_\_

beam angle 20° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 20° beam; degree of protection IP20; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

**Electrical**

non DIM \_\_\_\_\_

system 51 W \_\_\_\_\_

inset 22.7 W \_\_\_\_\_

650 mA \_\_\_\_\_


total insets 45 W \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 123 lm/W<sup>3</sup> \_\_\_\_\_

inset 138 lm/W<sup>4</sup> \_\_\_\_\_


## Light distribution



spot 20°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 17500    | 0.34  |
| 2     | 4400     | 0.69  |
| 3     | 1900     | 1.03  |
| 4     | 1100     | 1.38  |
| 5     | 700      | 1.72  |

## Product drawing

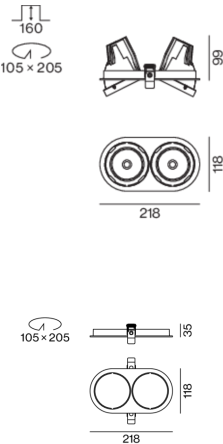

**Physical**

length 218 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 99 mm \_\_\_\_\_

0.12 kg \_\_\_\_\_

**Cutout**

diameter 105 mm \_\_\_\_\_

length 205 mm \_\_\_\_\_

width 105 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 160 mm \_\_\_\_\_

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# TWIST 100 trim 2 lamps

048-1121118S 048-2798318 002-90780



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

