

TWIST 100 trim 2 lamps

048-1121118S 048-2798317 002-90780



Project / Type _____

Notes _____

Count / Date _____



Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim traffic white; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 20° beam; degree of protection IP20; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



spot 20°

h (m)	E0° (lx)	ø (m)
1	17500	0.34
2	4400	0.69
3	1900	1.03
4	1100	1.38
5	700	1.72

Product drawing

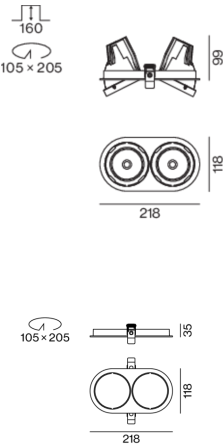

General

Ceiling , Recessed _____

tilt max 45° _____

rotation 360° _____

black , RAL9005 ¹ _____

Mounting set traffic white _____

front IP20 , back IP20 _____

6280 lm _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 100 , R_f: 92 , R₍₁₋₁₅₎: 91 _____

MR 0.78 _____

MDER 0.71 _____

Optical

spot _____

beam angle 20° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

non DIM _____

51 W _____

inset 22.7 W _____

650 mA _____

total insets 45 W _____

PC2 220-240V _____

123 lm/W _____

inset 138 lm/W _____

Physical

length 218 mm _____

width 118 mm _____

height 99 mm _____

0.12 kg _____

Cutout

diameter 105 mm _____

length 205 mm _____

width 105 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 160 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



TWIST 100 trim 2 lamps

048-1121118S 048-2798317 002-90780



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.977	0.94	0.905	0.871	0.838
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Components

MOUNTING SET with trim 2 lamps

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	218-118-35	048-2798317

POWER SUPPLY

L-W-H (MM)	ARTICLE NUMBER(S)
143-43-30	002-90780

Mounting accessories

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm	105-58-30	005-2531110
DALI cable ø 4 – 12 mm	105-58-30	005-2551110

Optical accessories

HONEYCOMB LOUVER

Ø (MM)	ARTICLE NUMBER(S)
75	080-6401118

Optical accessories

LINEAR PRISMATIC LENS

Ø (MM)	ARTICLE NUMBER(S)
75	080-6402110P

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	20
B16	32
C10	33
C16	53



TWIST 100 trim 2 lamps

048-1121118S 048-2798317 002-90780



Project / Type

Notes

Count / Date

Optical accessories

SNOOT

TYPE	Ø (MM)	ARTICLE NUMBER(S)
short	66	080-6403118
medium	66	080-6403218
angle	66	080-6403318

