

# TWIST 100 trim 2 lamps

048-1121118M 048-2798318 002-90789



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



**General**

Ceiling , Recessed \_\_\_\_\_

tilt max 45° \_\_\_\_\_

rotation 360° \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

front IP20 , back IP20 \_\_\_\_\_

6400 lm \_\_\_\_\_

**LED**

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 91 \_\_\_\_\_

MR 0.78 \_\_\_\_\_

MDER 0.71 \_\_\_\_\_

**Optical**

medium \_\_\_\_\_

beam angle 27° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

**Electrical**

DALI-2 \_\_\_\_\_

system 51 W \_\_\_\_\_

inset 22.7 W \_\_\_\_\_

650 mA \_\_\_\_\_

total insets 45 W \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 125 lm/W<sup>3</sup> \_\_\_\_\_

inset 141 lm/W<sup>4</sup> \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

**Physical**

length 218 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 99 mm \_\_\_\_\_

0.28 kg \_\_\_\_\_

**Cutout**

diameter 105 mm \_\_\_\_\_

length 205 mm \_\_\_\_\_

width 105 mm \_\_\_\_\_


min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 160 mm \_\_\_\_\_

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 27° beam; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



medium 27°

h (m)	E0° (lx)	ø (m)
1	10300	0.49
2	2600	0.97
3	1100	1.46
4	600	1.95
5	400	2.43

## Product drawing

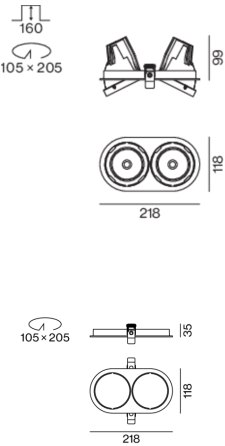

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# TWIST 100 trim 2 lamps

048-1121118M 048-2798318 002-90789



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

