

TWIST 100 trim 2 lamps

048-1121218M 048-2798317 002-90789



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
tilt max 45°
rotation 360°
black , RAL9005 ¹
Mounting set traffic white
front IP20 , back IP20
6380 lm

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_r: 92 , R_{t(1-5)}: 93
MR 0.61
MDER 0.55

Optical

medium
beam angle 27°
P_{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 51 W
inset 22.7 W
650 mA
total insets 45 W
PC2 220-240V
system 125 lm/W³
inset 140 lm/W⁴
1 DALI Addr.

Physical


length 218 mm
width 118 mm
height 99 mm
0.68 kg

Cutout

diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 160 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim traffic white; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 27° beam; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



medium 27°

h (m)	E0° (lx)	ø (m)
1	10200	0.49
2	2600	0.97
3	1100	1.46
4	600	1.95
5	400	2.43

Product drawing

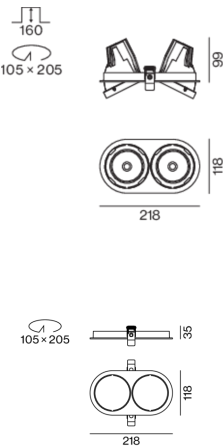

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses



TWIST 100 trim 2 lamps

048-1121218M 048-2798317 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

