

# TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789




|                |  |
|----------------|--|
| Project / Type |  |
| Notes          |  |
| Count / Date   |  |



Round recessed spotlight in die-cast aluminium; 2 lamps; surface white powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 39° beam; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



flood 39°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 6490     | 0.70  |
| 2     | 1620     | 1.40  |
| 3     | 720      | 2.10  |
| 4     | 410      | 2.80  |
| 5     | 260      | 3.50  |

## Product drawing

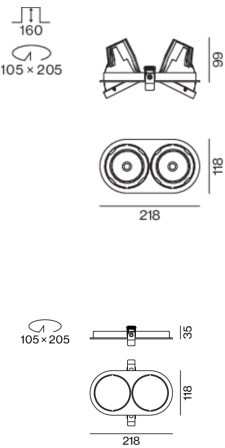

## General

Ceiling , Recessed  
tilt max 45°  
rotation 360°  
white , RAL 9016 <sup>1</sup>  
Mounting set jet black  
front IP20 , back IP20  
6320 lm  
fixture 139 lm/W<sup>2</sup>

## LED

4000 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(-15)</sub>: 91  
MR 0.78  
MDER 0.71

## Optical

flood  
beam angle 39°  
PstLM  $\leq 1.0$  <sup>3</sup>  
SVM  $\leq 0.4$  <sup>3</sup>

## Electrical

DALI-2  
220-240 V  
system 51 W  
fixture 22.7 W  
650 mA  
fixture 45 W  
PC2  
1 DALI Addr.

## Physical

length 218 mm  
width 118 mm  
height 99 mm  
0.6 kg

## Cutout

diameter 105 mm  
length 205 mm  
width 105 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 160 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator



# TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.977                        | 0.94   | 0.905             | 0.871                           | 0.838  |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Faktor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 18                 |
| B16                            | 30                 |
| C10                            | 23                 |
| C16                            | 36                 |

## Components

### MOUNTING SET with trim 2 lamps

| TYPE                      | COLOUR    | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------|------------|-------------------|
| for intermediate ceilings | jet black | 218-118-35 | 048-2798318       |



### POWER SUPPLY

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 143-43-30  | 002-90789         |



## Mounting accessories

### THROUGH WIRING CONNECTION BOX

| TYPE                                     | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30  | 005-2531110       |
| DALI cable ø 4 – 12 mm, Linect®-Ready    | 105-58-30  | 005-2551110       |



## Optical accessories

### HONEYCOMB LOUVER

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75     | 080-6401118       |



## Optical accessories

### LINEAR PRISMATIC LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75     | 080-6402110P      |



# TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789



Project / Type

Notes

Count / Date

## Optical accessories

### SNOOT

| TYPE   | Ø (MM) | ARTICLE NUMBER(S) |
|--------|--------|-------------------|
| short  | 66     | 080-6403118       |
| medium | 66     | 080-6403218       |
| angle  | 66     | 080-6403318       |

