

TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
tilt max 45°
rotation 360°
black , RAL 9005 ¹
Mounting set jet black
front IP20 , back IP20
6300 lm
fixture 139 lm/W²

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 98 , R_r: 91 , R_{1-15}: 93
MR 0.54
MDER 0.49

Optical

medium
beam angle 27°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 51 W
fixture 22.7 W
650 mA
fixture 45 W
PC2
1 DALI Addr.

Physical


length 218 mm
width 118 mm
height 99 mm
0.68 kg

Cutout

diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 160 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 27° beam; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



medium 27°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 10100 | 0.49 |
| 2 | 2500 | 0.97 |
| 3 | 1100 | 1.46 |
| 4 | 600 | 1.95 |
| 5 | 400 | 2.43 |

Product drawing

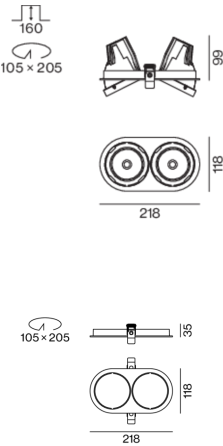

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)



TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.977 | 0.94 | 0.905 | 0.871 | 0.838 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 18 |
| B16 | 30 |
| C10 | 23 |
| C16 | 36 |

Components

MOUNTING SET with trim 2 lamps

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------|------------|-------------------|
| for intermediate ceilings | jet black | 218-118-35 | 048-2798318 |



POWER SUPPLY

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 143-43-30 | 002-90789 |



Mounting accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Optical accessories

HONEYCOMB LOUVER

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75 | 080-6401118 |



Optical accessories

LINEAR PRISMATIC LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75 | 080-6402110P |



TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type

Notes

Count / Date

Optical accessories

SNOOT

| TYPE | Ø (MM) | ARTICLE NUMBER(S) |
|--------|--------|-------------------|
| short | 66 | 080-6403118 |
| medium | 66 | 080-6403218 |
| angle | 66 | 080-6403318 |

