

TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 45° _____

rotation 360° _____

black , RAL9005 ¹ _____

Mounting set jet black _____

front IP20 , back IP20 _____

6300 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_r: 91 , R_{t(1-15)}: 93 _____

MR 0.54 _____

MDER 0.49 _____

Optical

medium _____

beam angle 27° _____

P_{stLM} ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

system 51 W _____

inset 22.7 W _____

650 mA _____

total insets 45 W _____

PC2 220-240V _____

system 124 lm/W³ _____

inset 139 lm/W⁴ _____

1 DALI Addr. _____

Physical

length 218 mm _____

width 118 mm _____

height 99 mm _____

0.68 kg _____

Cutout

diameter 105 mm _____

length 205 mm _____

width 105 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 160 mm _____


¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 27° beam; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



medium 27°

h (m)	E0° (lx)	ø (m)
1	10100	0.49
2	2500	0.97
3	1100	1.46
4	600	1.95
5	400	2.43

Product drawing

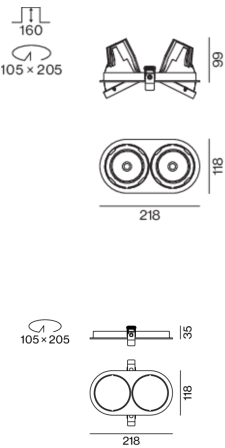

TWIST 100 trim 2 lamps

048-1121018M 048-2798318 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

