

TWIST 100

trimless

048-1121018M 048-2796117 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 45°

rotation 360°

black , RAL 9005 ¹

Mounting set traffic white

front IP20 , back IP20

3150 lm

fixture 139 lm/W²

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 91 , R_{f(1-15)}: 93

MR 0.54

MDER 0.49

Optical

medium

beam angle 27°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

non DIM

220-240 V

system 25.3 W

fixture 22.7 W

650 mA

PC2

Physical

diameter 105 mm

height 99 mm

0.57 kg

Cutout


diameter 106 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm

recessed depth 160 mm


Light distribution



medium 27°

h (m)	E0° (lx)	ø (m)
1	10100	0.49
2	2500	0.97
3	1100	1.46
4	600	1.95
5	400	2.43

Product drawing

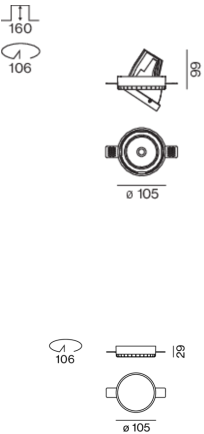

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

