

TWIST 100 trim 2 lamps

048-1121018F 048-2798318 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 45°

rotation 360°

black , RAL 9005 ¹

Mounting set jet black

front IP20 , back IP20

6220 lm

fixture 137 lm/W²

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_r: 91 , R_{f(1-15)}: 93

MR 0.54

MDER 0.49

Optical

flood

beam angle 39°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

non DIM

220-240 V

system 51 W

fixture 22.7 W

650 mA

fixture 45 W

PC2

Physical

length 218 mm

width 118 mm

height 99 mm

0.12 kg

Cutout

diameter 105 mm

length 205 mm

width 105 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 160 mm


¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 39° beam; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 39°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 6390 | 0.70 |
| 2 | 1600 | 1.40 |
| 3 | 710 | 2.10 |
| 4 | 400 | 2.80 |
| 5 | 260 | 3.50 |

Product drawing

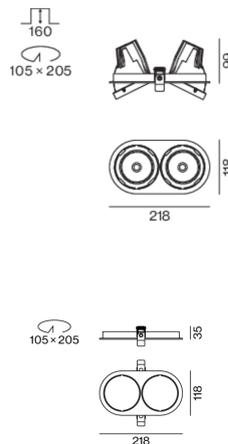

TWIST 100 trim 2 lamps

048-1121018F 048-2798318 002-90780



Project / Type

Notes

Count / Date

**Installation
instructions**



**Lighting
calculator**



TWIST 100 trim 2 lamps

048-1121018F 048-2798318 002-90780



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.977 | 0.94 | 0.905 | 0.871 | 0.838 |
| LSF | 1 | 1 | 1 | 1 | 1 |

MF LMF × RSMF × LLMF × LSF
 MF Maintenance Factor
 LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 20 |
| B16 | 32 |
| C10 | 33 |
| C16 | 53 |

Components

MOUNTING SET with trim 2 lamps

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|-----------|------------|-------------------|
| for intermediate ceilings | jet black | 218-118-35 | 048-2798318 |



CONVERTER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 31 W | 143-43-30 | 002-90780 |



Mounting accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Optical accessories

HONEYCOMB LOUVER

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75 | 080-6401118 |



Optical accessories

LINEAR PRISMATIC LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 75 | 080-6402110P |



TWIST 100 trim 2 lamps

048-1121018F 048-2798318 002-90780



Project / Type

Notes

Count / Date

Optical accessories

SNOOT

| TYPE | Ø (MM) | ARTICLE NUMBER(S) |
|--------|--------|-------------------|
| short | 66 | 080-6403118 |
| medium | 66 | 080-6403218 |
| angle | 66 | 080-6403318 |

