

TWIST 100 trim 2 lamps

048-1121017S 048-2798317 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 45°
 rotation 360°
 white , RAL 9016 ¹
 Mounting set traffic white
 front IP20 , back IP20
 6200 lm
 fixture 136 lm/W²

LED

3000 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 2 SDCM
 R_g: 98 , R_r: 91 , R_{f(1-15)}}: 93
 MR 0.54
 MDER 0.49

Optical

spot
 beam angle 20°
 PstLM ≤ 1.0 ³
 SVM ≤ 0.4 ³

Electrical

non DIM
 220-240 V
 system 51 W
 fixture 22.7 W
 650 mA
 fixture 45 W
 PC2

Physical


length 218 mm
 width 118 mm
 height 99 mm
 0.47 kg

Cutout

diameter 105 mm
 length 205 mm
 width 105 mm
 min. ceiling thickness 2 mm
 max. ceiling thickness 25 mm
 recessed depth 160 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white powder coated; installation without tools in mounting set due to patented ball catch system; with trim traffic white; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 20° beam; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



spot 20°

h (m)	E0° (lx)	ø (m)
1	17300	0.34
2	4300	0.69
3	1900	1.03
4	1100	1.38
5	700	1.72

Product drawing

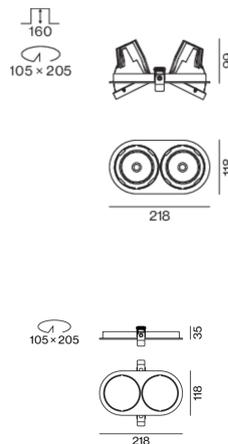

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

TWIST 100 trim 2 lamps

048-1121017S 048-2798317 002-90780



Project / Type

Notes

Count / Date

**Installation
instructions**



**Lighting
calculator**

