

# MOVE IN 45 square

trimless


063-8421516V 063-8832117 002-90729



Project / Type

Notes

Count / Date

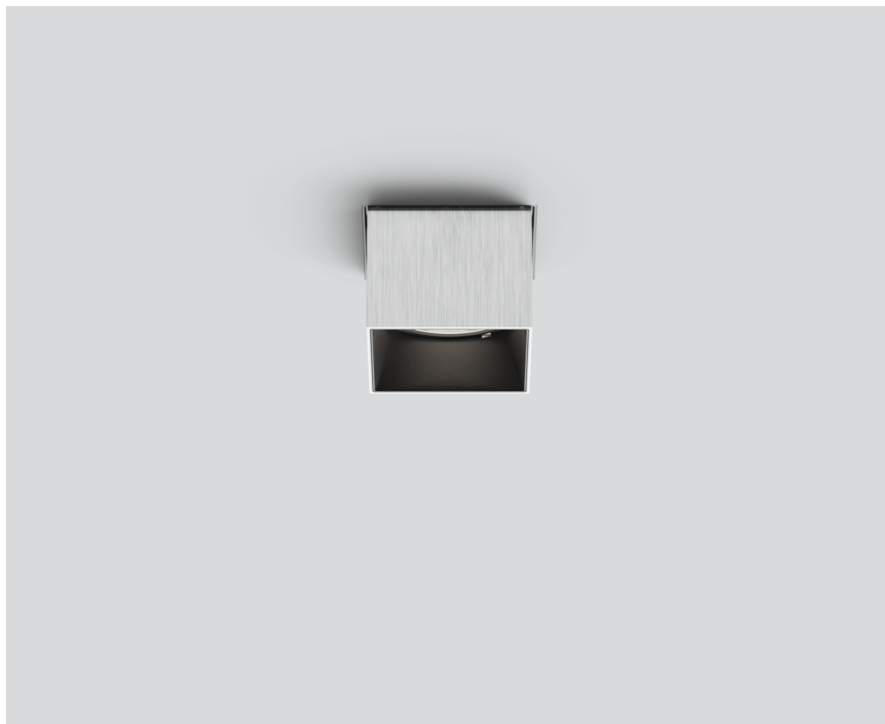

## General

Ceiling , Semi-Recessed

brushed aluminium

IP20

346 lm

## LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.6

MDER 0.55

## Optical

super spot

beam angle 8°

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Electrical

DALI-2

220-240 V

system 9.2 W

inset 6.9 W

11 Vf

600 mA

PC2

system 38 lm/W<sup>2</sup>

inset 50 lm/W<sup>2</sup>

1 DALI Addr.

## Physical

trimless

diameter 80 mm

height 105 mm

0.21 kg

## Cutout


diameter 65 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 175 mm

## Light distribution



super spot 8°

h (m)	E0° (lx)	ø (m)
1	12100	0.14
2	3000	0.28
3	1300	0.41
4	800	0.55
5	500	0.69

## Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> SYSTEM: incl. consideration of optical losses and the efficiency of the operating device. INSET: incl. consideration of optical losses.

## Installation instructions



## Lighting calculator

