

BO 45 semi-recessed


049-613051XM 002-90728



Project / Type

Notes

Count / Date

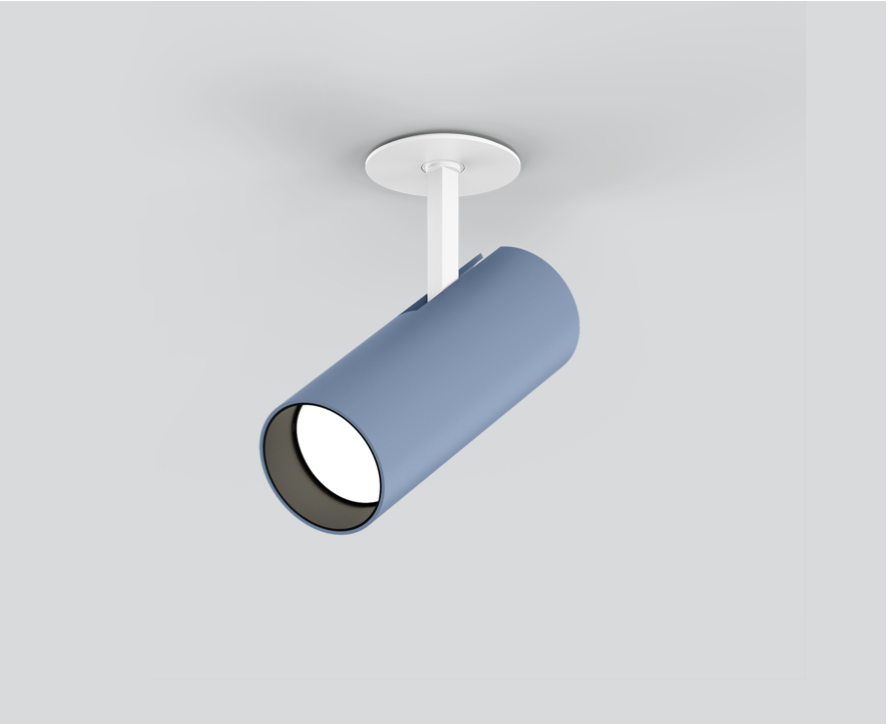

General

Ceiling , Semi-Recessed

tilt max 90°

rotation 350°

special colours

IP20

1290 lm

fixture 95 lm/W¹

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-5)}: 88

MR 0.59

MDER 0.53

Optical

medium

beam angle 24°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 15.9 W

fixture 13.5 W

36 Vf

400 mA

PC2

1 DALI Addr.

Physical

diameter 45 mm

height 149 mm

0.34 kg

Cutout

diameter 46 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 150 mm


Cylindrical spotlight in aluminium; surface special colours powder coated; 350° rotatable and 90° tiltable; recessed version with trim; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 24° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



| medium 24° | | | |
|------------|----------|-------|--|
| h (m) | EO° (lx) | ø (m) | |
| 1 | 6210 | 0.43 | |
| 2 | 1550 | 0.86 | |
| 3 | 690 | 1.30 | |
| 4 | 390 | 1.73 | |
| 5 | 250 | 2.16 | |

Product drawing



¹ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

