

NOBA 60 suspended 1 lamp


MOVE IT PRO
086-71009377W



Project / Type

Notes

Count / Date

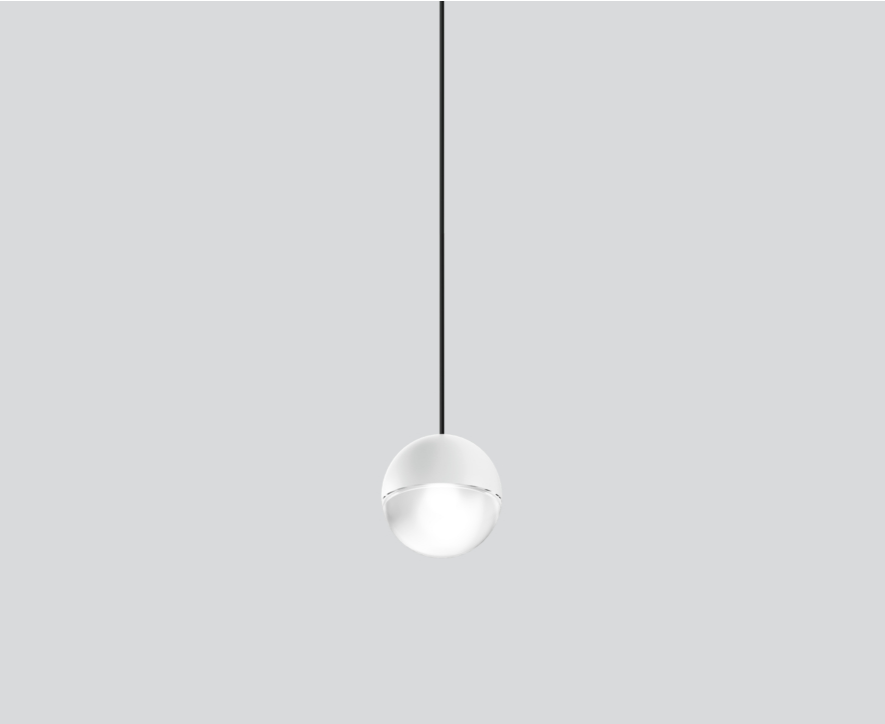

General

Ceiling , Track Suspended

traffic white , RAL9016 ¹

Converter Traffic White

IP20

949 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 91 , R_{t(1-15)}: 89

MR 0.53

MDER 0.48

Optical

wide flood

beam angle 67°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 10.0 W

PC2 220-240V

system 95 lm/W³

1 DALI Addr.

Physical

length 60 mm

width 60 mm


height 60 mm

adapter 402 mm

suspension 2000 mm


¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



wide flood 67°			
h (m)	E0° (lx)	ø (m)	
1	902	1.31	
2	226	2.63	
3	100	3.94	
4	56	5.26	
5	36	6.57	

Product drawing



Installation instructions

Lighting calculator

