


TUBIN 60 CONEX socket / socket

surface / suspended system
058-5038638C



Project / Type	
Notes	
Count / Date	

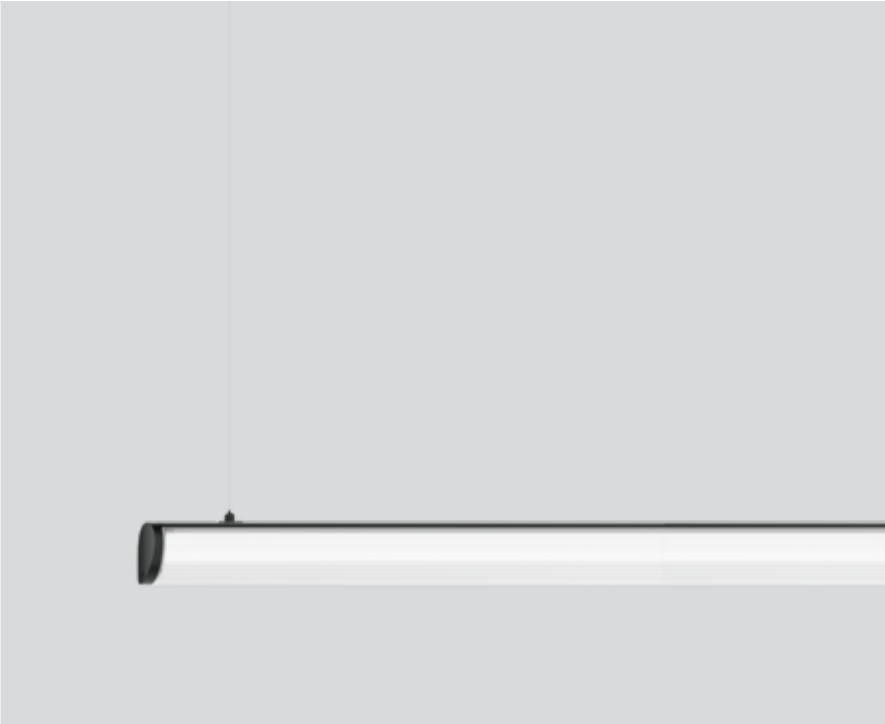

General

Ceiling / Wall , Surface	
black , RAL 9005 ¹	
IP20	
7680 lm	
3270 lm/m	

LED

4000 K	
CRI ≥ 80	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.72	
MDER 0.65	

Optical

Clear Cover	
opal (lambertsch)	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical


DALI-2	
220-240 V	
system 54 W	
system 142 lm/W ³	
PC1	
23 W/m	

Physical

length 2351 mm	
width 60 mm	
height 60 mm	

Carrier profile made of extruded aluminium profile; converter integrated into luminaire housing; for continuous lighting systems; surface black powder coated; for wall-/ceiling surface mounting or suspended mounting (1500 mm cable suspension - oblique or straight - as an accessory); easy installation using ceiling clips (available as an accessory) or with integrated toolless suspension height adjustment on the luminaire; freely positioned attachment to the luminaire; canopy for through wiring (available as an accessory); electrical connection of the luminaires via plug/socket system; connectors (L-, T- or X-shape) available as an accessory; luminaire connection rotatable around its own axis, which means that any spatial angle can be realized; light control via high quality lens system for maximum, homogeneous illumination; clear, cylindrical cover with linear prismatic optic; with gentle ceiling illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

