

MINO 60 direct / indirect high lumen ceiling /

suspended system


046-502453XH



Project / Type _____

Notes _____

Count / Date _____

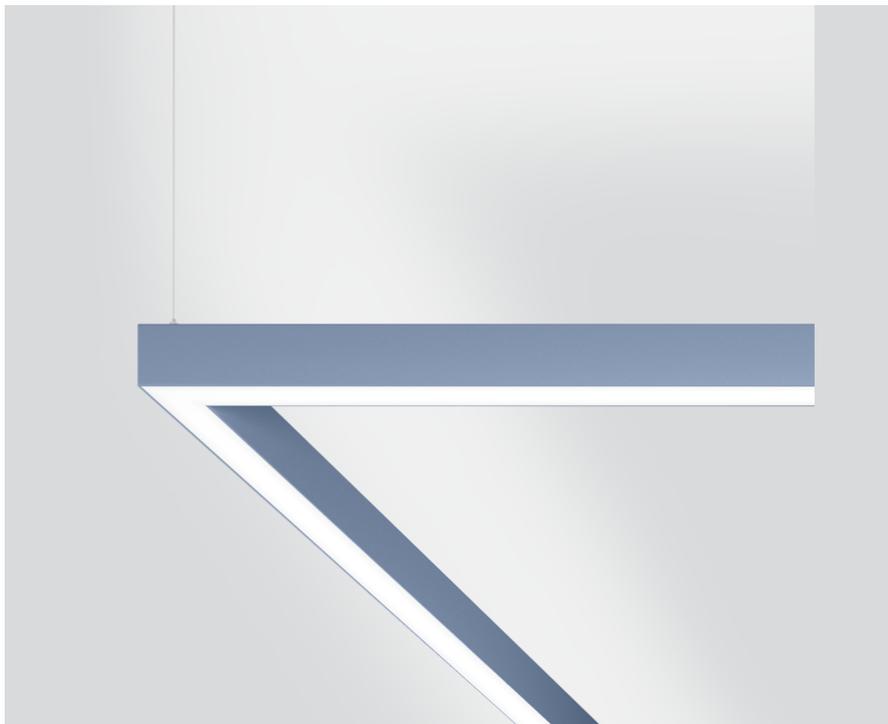

General

Ceiling , Suspended _____
 special colours _____
 3800 lm/m _____
 IP20 _____
 indirect 1690 lm _____
 direct 2760 lm _____
 total 4450 lm _____

LED

3000 K _____
 CRI \geq 80 _____
 L90 / 50000 h _____
 photobio. safety RG 0 - no Risk _____
 initial MacAdam \leq 3 SDCM _____
 MR 0.56 _____
 MDER 0.51 _____

Optical

High Performance Opal _____
 opal (lambertsch) _____
 PstLM \leq 1.0 ¹ _____
 SVM \leq 0.4 ¹ _____

Electrical

DALI-2 _____
 system 34 W _____
 PC1 220-240V _____
 system 131 lm/W² _____
 1 DALI Addr. _____
 29 W/m _____


Physical

length 1172 mm _____
 width 60 mm _____
 height 80 mm _____
 3.2 kg _____

¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light tight final end caps made of aluminium (available as an accessory); no visible screws; surface special colours powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; direct/indirect illumination characteristic; indirect light component with integrated PC boards for maximum, homogeneous ceiling illumination; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator



MINO 60 direct / indirect high lumen ceiling /

suspended system

046-502453XH



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B13	23
B16	28
B20	35
C10	30
C13	38
C16	46
C20	58

Mounting accessories

END CAPS

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1 pair	traffic white	60-40-4	046-5010017
1 pair	jet black	60-40-4	046-5010018
1 pair	white aluminium	60-40-4	046-501001G
1 pair	special colours	60-40-4	046-501001X



Mounting accessories

LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 piece	005-40046
10 pieces	005-40046.10



OPAL COVER LINEAR CONNECTOR

ARTICLE NUMBER(S)
006-14000



Mounting accessories

CABLE SUSPENSION

ARTICLE NUMBER(S)
005-2122110



CABLE RAIL

Ø (MM)	ARTICLE NUMBER(S)
1200	005-2491110



MINO 60 direct / indirect high lumen ceiling /

suspended system

046-502453XH



Project / Type

Notes

Count / Date

Electrical accessories

THROUGH WIRE

TYPE

3 x 1,5 mm² | 10 pieces

5 x 1,5 mm² | 10 pieces

ARTICLE NUMBER(S)

004-90003

004-90005



Electrical accessories

CANOPY / FEEDER CABLE

TYPE

3 x 1,5 mm²

3 x 1,5 mm²

5 x 1,5 mm²

5 x 1,5 mm²

COLOUR

traffic white

jet black

pure white

jet black

L-W-H (MM)

90-90-22

90-90-22

90-90-22

90-90-22

ARTICLE NUMBER(S)

005-2212317

005-2212318

005-2212417

005-2212418

