

# MINO 60 high lumen

ceiling / suspended system


007-93M9537 006-16302Z 046-400901X



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

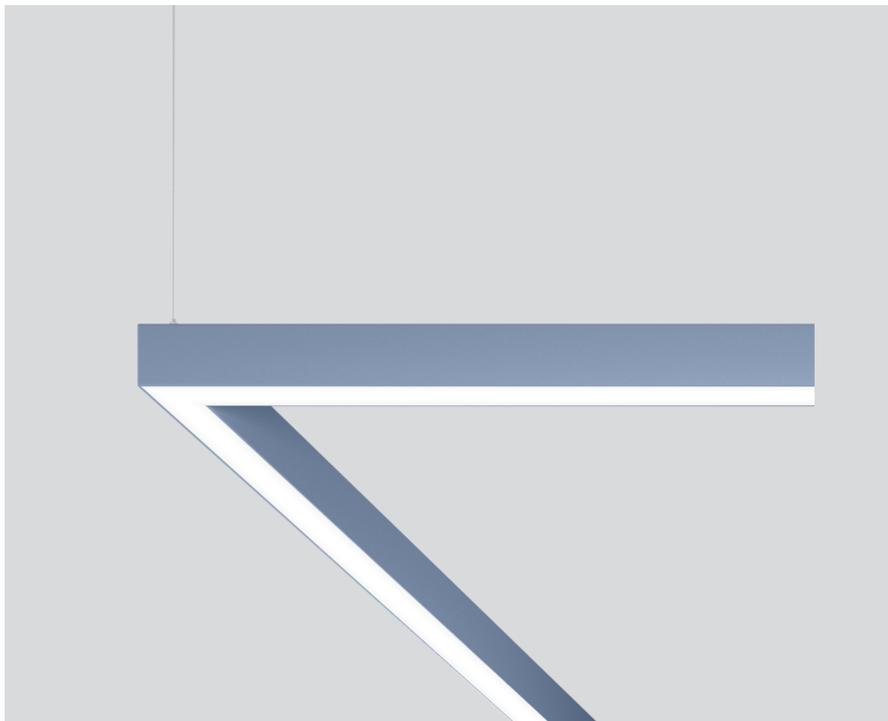

## General

Ceiling , Suspended \_\_\_\_\_

special colours \_\_\_\_\_

IP20 \_\_\_\_\_

6190 lm \_\_\_\_\_

2070 lm/m \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI  $\geq$  80 \_\_\_\_\_

L90 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq$  3 SDCM \_\_\_\_\_

MR 0.56 \_\_\_\_\_

MDER 0.51 \_\_\_\_\_

## Optical

Microprismatic \_\_\_\_\_

microprismatic \_\_\_\_\_

PstLM  $\leq$  1.0 <sup>1</sup> \_\_\_\_\_

SVM  $\leq$  0.4 <sup>1</sup> \_\_\_\_\_

## Electrical

DALI-2 \_\_\_\_\_

220-240 V \_\_\_\_\_

system 58 W \_\_\_\_\_

PC1 \_\_\_\_\_

system 107 lm/W<sup>2</sup> \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

19 W/m \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 3000 mm \_\_\_\_\_


width 60 mm \_\_\_\_\_

height 80 mm \_\_\_\_\_

7.4 kg \_\_\_\_\_

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light tight final end caps made of aluminium (available as an accessory); no visible screws; surface special colours powder coated; for ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; luminaire profile for mounting available in advance; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator



# MINO 60 high lumen

ceiling / suspended system

007-93M9537 006-16302Z 046-400901X



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	7
B13	10
B16	12
B20	14
C10	10
C13	20
C16	24
C20	28

## Components

### LIGHT OPTIC COVER

TYPE	ARTICLE NUMBER(S)
microprismatic	006-16302Z

### INSTALLATION CHANNEL

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
3000 mm	special colours	3000-60-80	046-400901X

## Mounting accessories

### END CAPS

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1 pair	traffic white	60-40-4	046-5010017
1 pair	jet black	60-40-4	046-5010018
1 pair	white aluminium	60-40-4	046-501001G
1 pair	special colours	60-40-4	046-501001X

## Mounting accessories

### LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 piece	005-40046
10 pieces	005-40046.10

### OPAL COVER LINEAR CONNECTOR

ARTICLE NUMBER(S)
006-14000



[007-93M9537 006-16302Z 046-400901X] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.02.2025

2 / 3

# MINO 60 high lumen

ceiling / suspended system

007-93M9537 006-16302Z 046-400901X



Project / Type

Notes

Count / Date

## Mounting accessories

### CEILING CLIP

COLOUR  
transparent

ARTICLE NUMBER(S)  
034-11636



## Mounting accessories

### CABLE SUSPENSION

ARTICLE NUMBER(S)  
005-2122110



### CABLE RAIL

Ø (MM)  
1200

ARTICLE NUMBER(S)  
005-2491110



## Electrical accessories

### THROUGH WIRE

TYPE  
3 x 1,5 mm<sup>2</sup> | 10 pieces  
5 x 1,5 mm<sup>2</sup> | 10 pieces

ARTICLE NUMBER(S)  
004-90003  
004-90005



## Electrical accessories

### CANOPY / FEEDER CABLE

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
3 x 1,5 mm <sup>2</sup>	traffic white	90-90-22	005-2212317
3 x 1,5 mm <sup>2</sup>	jet black	90-90-22	005-2212318
5 x 1,5 mm <sup>2</sup>	pure white	90-90-22	005-2212417
5 x 1,5 mm <sup>2</sup>	jet black	90-90-22	005-2212418

