

MINO 60 high lumen

ceiling / suspended system


007-93M4517 006-16122Z 046-400401X



Project / Type

Notes

Count / Date

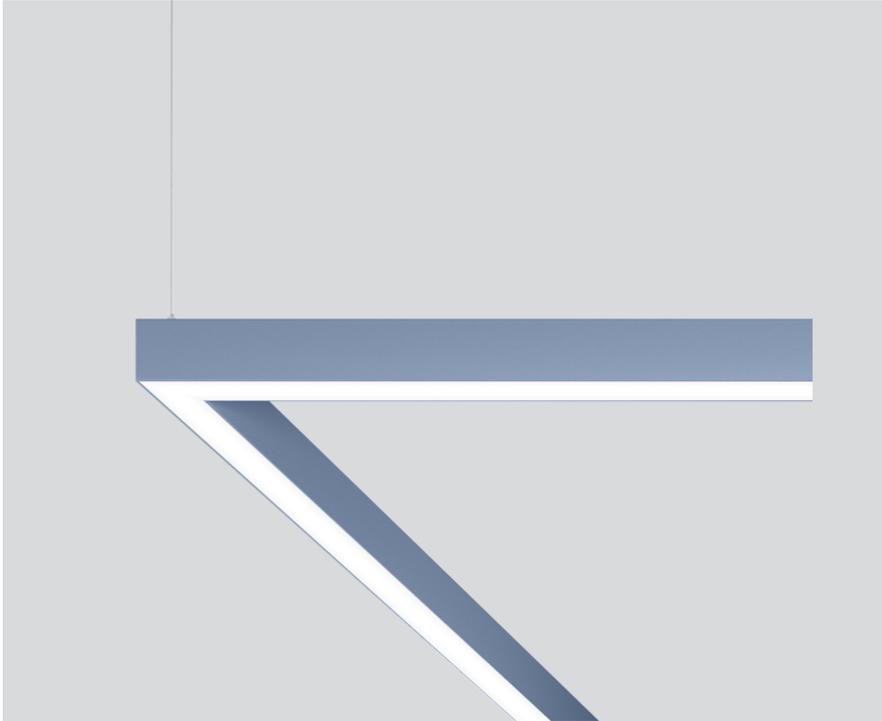

General

Ceiling , Suspended

special colours

2050 lm/m

IP20

2400 lm

LED

3000 K

CRI \geq 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam \leq 3 SDCM

MR 0.56

MDER 0.51

Optical

Microprismatic

microprismatic

PstLM \leq 1.0¹

SVM \leq 0.4¹

Electrical

non DIM

system 23.3 W

PC1 220-240V

system 103 lm/W²

20 W/m

Physical

trim

length 1172 mm


width 60 mm

height 80 mm

3.1 kg

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light tight final end caps made of aluminium (available as an accessory); no visible screws; surface special colours powder coated; for ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; luminaire profile for mounting available in advance; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. converter, non dimmable; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Lighting calculator



MINO 60 high lumen

ceiling / suspended system

007-93M4517 006-16122Z 046-400401X



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.92 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |

MF LMF × RSMF × LLMF × LSF
MF Maintenance Factor
LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor
LLMF Lamp Lumens Maintenance Factor
LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 9 |
| B13 | 13 |
| B16 | 15 |
| B20 | 18 |
| C10 | 18 |
| C13 | 26 |
| C16 | 30 |
| C20 | 36 |

Components

LIGHT OPTIC COVER

| TYPE | ARTICLE NUMBER(S) |
|----------------|-------------------|
| microprismatic | 006-16122Z |

INSTALLATION CHANNEL

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------|-----------------|------------|-------------------|
| 1172 mm | special colours | 1172-60-80 | 046-400401X |

Mounting accessories

END CAPS

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------|-----------------|------------|-------------------|
| 1 pair | traffic white | 60-40-4 | 046-5010017 |
| 1 pair | jet black | 60-40-4 | 046-5010018 |
| 1 pair | white aluminium | 60-40-4 | 046-501001G |
| 1 pair | special colours | 60-40-4 | 046-501001X |



Mounting accessories

LINEAR CONNECTOR

| TYPE | ARTICLE NUMBER(S) |
|-----------|-------------------|
| 1 piece | 005-40046 |
| 10 pieces | 005-40046.10 |



OPAL COVER LINEAR CONNECTOR

| ARTICLE NUMBER(S) |
|-------------------|
| 006-14000 |



[007-93M4517 006-16122Z 046-400401X] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

2111.2024

2 / 3

MINO 60 high lumen

ceiling / suspended system

007-93M4517 006-16122Z 046-400401X



Project / Type

Notes

Count / Date

Mounting accessories

CEILING CLIP

COLOUR
transparent

ARTICLE NUMBER(S)
034-11636



Mounting accessories

CABLE SUSPENSION

ARTICLE NUMBER(S)
005-2122110



CABLE RAIL

Ø (MM)
1200

ARTICLE NUMBER(S)
005-2491110



Electrical accessories

THROUGH WIRE

TYPE
3 x 1,5 mm² | 10 pieces
5 x 1,5 mm² | 10 pieces

ARTICLE NUMBER(S)
004-90003
004-90005



Electrical accessories

CANOPY / FEEDER CABLE

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------------------|---------------|------------|-------------------|
| 3 x 1,5 mm ² | traffic white | 90-90-22 | 005-2212317 |
| 3 x 1,5 mm ² | jet black | 90-90-22 | 005-2212318 |
| 5 x 1,5 mm ² | pure white | 90-90-22 | 005-2212417 |
| 5 x 1,5 mm ² | jet black | 90-90-22 | 005-2212418 |

