

ARY cable suspended 2 lamps

MOVE IT PRO


086-731013X8F



Project / Type

Notes

Count / Date

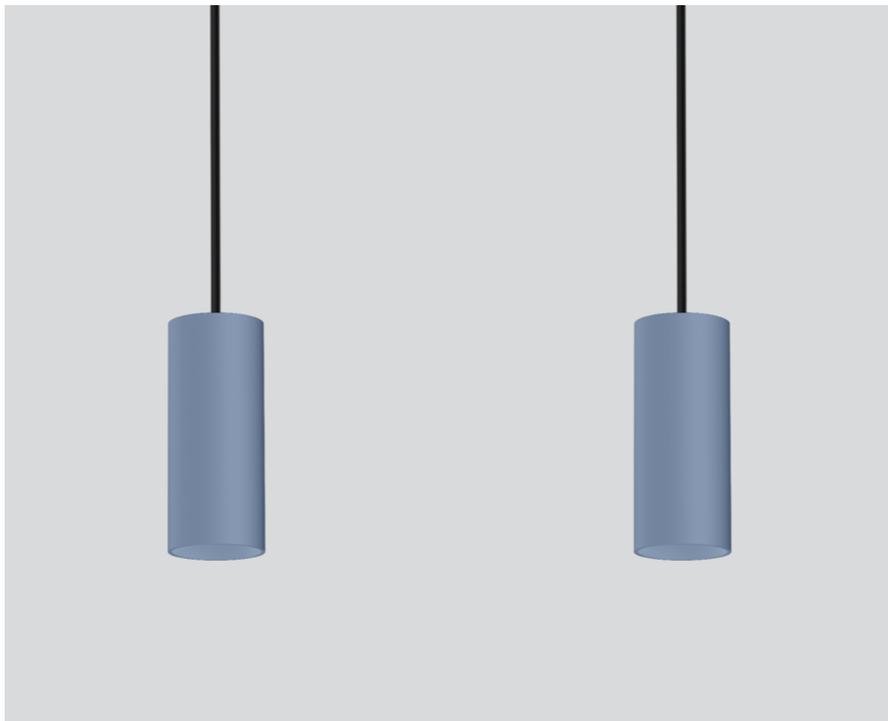

General

Ceiling , Track Suspended

special colours

Converter Jet Black

IP20

2340 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 96 , R_r: 89 , R₍₁₋₁₅₎: 89

MR 0.84

MDER 0.76

Optical

flood

beam angle 44°

PstLM ≤ 1.0^{1 2}

SVM ≤ 0.4^{1 2}

Electrical

DALI-2

220-240 V

system 28.2 W

system 83 lm/W³

PC2

1 DALI Addr.

Physical

cable 2000 mm


diameter 47 mm

height 110 mm

adapter 402 mm

Decorative pendant light inset made of aluminium; 2 lamps; cylindrical spotlight heads; surface special colours powder coated; light inset, incl. high power adapter + converter can be installed flexibly and without tools; power supplied via MOVE IT PRO system track profile; pendant fitting with 2000mm suspension, incl. feed (special colours), can be individually shortened; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC2; 220-240 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 44° combined

h (m)	E0 ² (lx)	ø (m)
1	4340	0.82
2	1080	1.64
3	480	2.45
4	270	3.27
5	170	4.09

Product drawing



¹ combined ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

