


# MITA circle 200 reflector

trim

074-8123537R




Project / Type
Notes
Count / Date

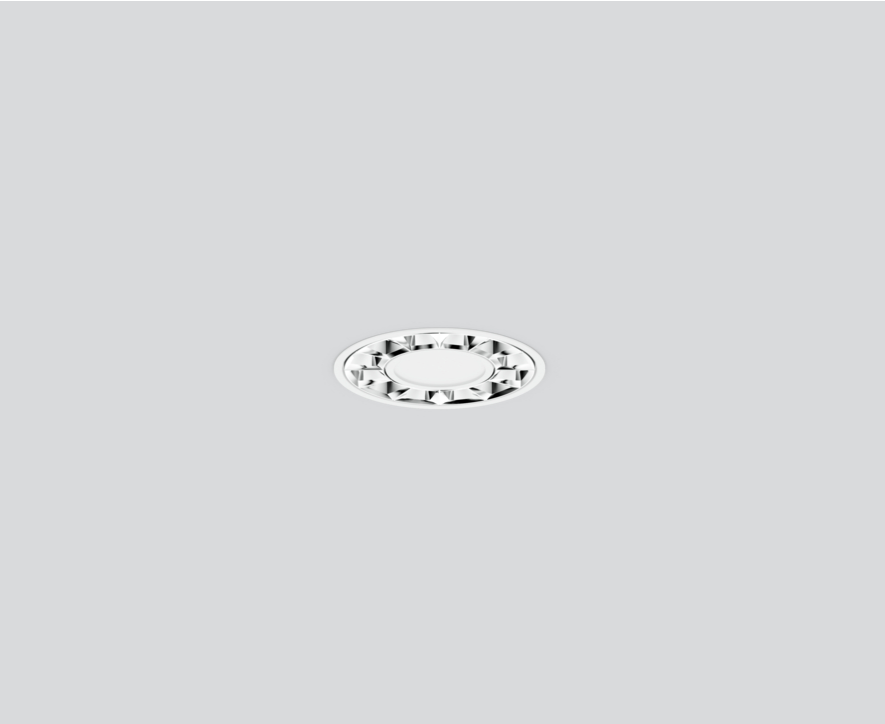


Ring-shaped light fitting in die-cast aluminium; extremely slim design; recessed light with wrap around edge; suitable for ceiling thickness of 2-25 mm; surface white powder coated; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR  $\leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500$  cd/m<sup>2</sup>; degree of protection IP20; PC2; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; converter wired secondary side; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling , Recessed
white , RAL 9016 <sup>1</sup>
Reflector chrome
IP20
1800 lm

## LED

3000 K
CRI $\geq 80$
L90 / 50000 h
initial MacAdam $\leq 3$ SDCM
MR 0.56
MDER 0.51

## Optical

Reflector
symmetric
UGR $< 19$ , $\geq 65^\circ < 1500$ cd/m <sup>2</sup>
PstLM $\leq 1.0$ <sup>2</sup>
SVM $\leq 0.4$ <sup>2</sup>

## Electrical

DALI-2
220-240 V
system 13.5 W
system 133 lm/W <sup>3</sup>
PC2

## Physical

diameter 210 mm
height 36 mm

## Cutout

diameter 200 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 62 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

