

# TUBIN 60

surface


058-5118138C



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

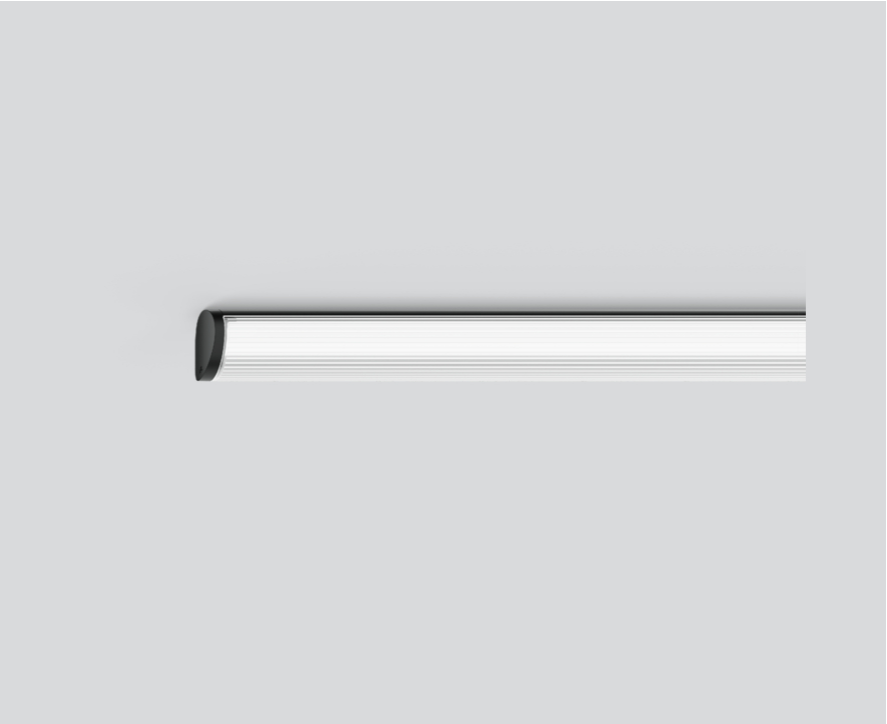

### General

Ceiling / Wall , Surface \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

2670 lm/m \_\_\_\_\_

IP20 \_\_\_\_\_

6280 lm \_\_\_\_\_

### LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L90 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 92 , R<sub>t(1-15)</sub>: 90 \_\_\_\_\_

MR 0.81 \_\_\_\_\_

MDER 0.74 \_\_\_\_\_

### Optical

Clear Cover \_\_\_\_\_

opal (lambertsch) \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

### Electrical

DALI-2 \_\_\_\_\_

system 54 W \_\_\_\_\_

PC1 220-240V \_\_\_\_\_

system 116 lm/W<sup>3</sup> \_\_\_\_\_

23 W/m \_\_\_\_\_

### Physical


length 2375 mm \_\_\_\_\_

width 60 mm \_\_\_\_\_

height 60 mm \_\_\_\_\_

Carrier profile made of extruded aluminium profile; light-tight end caps in aluminium; converter integrated into luminaire housing; surface black powder coated; suitable for wall or ceiling mounting; easy installation using ceiling clips; light control via high quality lens system for maximum, homogeneous illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; clear, cylindrical cover with linear prismatic optic; with gentle ceiling illumination; degree of protection IP20; PC1 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

### Installation instructions

