




Project / Type

Notes

Count / Date

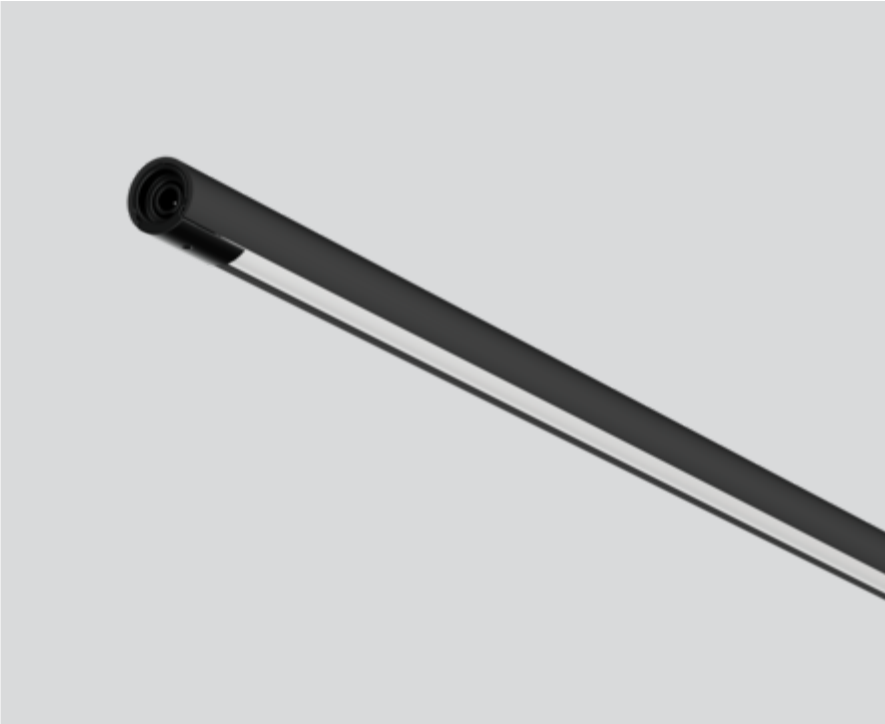

General

Showcase , Recessed

black , RAL9021 ¹

1170 lm/m

IP20

Interior

436 lm

LED

4000 K

CRI ≥ 97

L85 / 50000 h

photobio. safety RG 1 - low Risk

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 96 , R_{f(1-15)}: 98

MR 0.86

MDER 0.78

Optical

Opal

opal (lambertsch)

Electrical

excl. driver

24 V

system 7.3 W

PC3 24V

inset 79 lm/W²

20 W/m

24 V

Physical


length 400 mm

width 9 mm

height 9 mm

¹ RAL code ² incl. optical losses

Light distribution



Product drawing



Installation instructions

