

FINA SUPPORT opal 30°


011-13060180



Project / Type _____

Notes _____

Count / Date _____

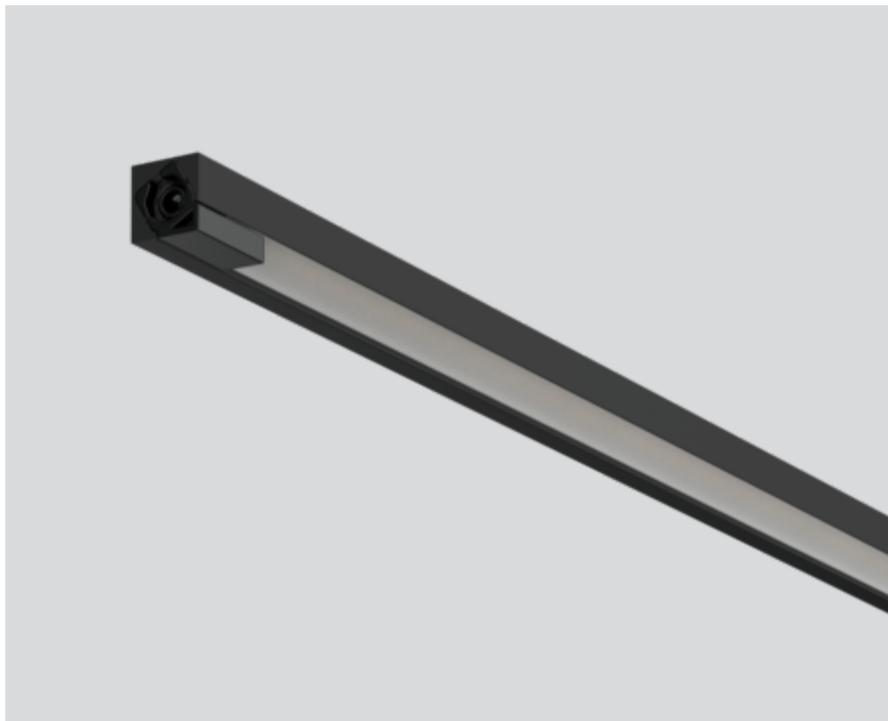

General

Showcase , Standing _____
rotation 360° _____
black , RAL 9021 ¹ _____
IP20 _____
Interior _____
1020 lm _____
optical inset 74 lm/W² _____

LED

3000 K _____
CRI ≥ 97 _____
L85 / 50000 h _____
initial MacAdam ≤ 3 SDCM _____
R_g: 99 , R_r: 96 , R₍₁₋₁₅₎: 97 _____
MR 0.68 _____
MDER 0.61 _____

Optical

Opal _____
opal (lambertsch) _____

Electrical

excl. driver _____
24 V _____
fixture 18.2 W _____
optical inset 13.9 W _____
PC3 _____
19 W/m _____
24 V _____

Physical

length 1000 mm _____
width 9 mm _____
height 9 mm _____

¹ RAL code


² OPTICAL INSET: incl. consideration of optical losses

Installation instructions



Miniature rectangular lamp made of aluminium; angular design; surface lacquered in black; plug and play electrical connector system for toolless mounting; different mechanical and electrical poles available - for flexible system design (available as an accessory); completely homogeneously illuminated, satinised PMMA cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; light inset rotatable; degree of protection IP20; PC3; 24 V; accessories are listed separately; light source replaceable by an authorized professional;

Light distribution



Product drawing

