


MITA circle 160

trim

074-8122018R 002-91122



Project / Type	
Notes	
Count / Date	

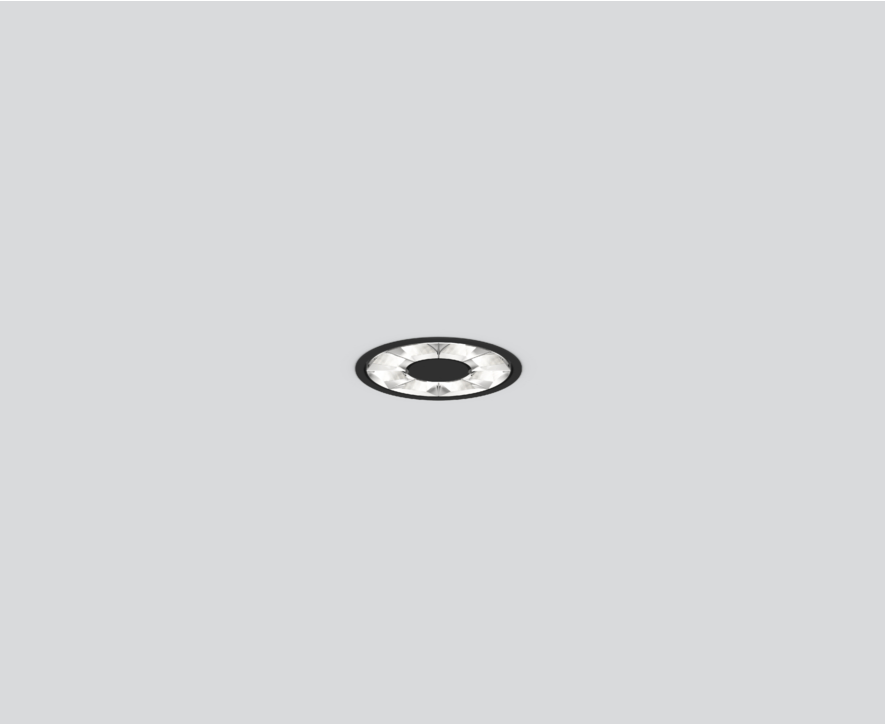


Ring-shaped light fitting in die-cast aluminium; extremely slim design; recessed light with wrap around edge; suitable for ceiling thickness of 2-25 mm; surface black powder coated; incl. blind cover made of plastic in the cut-out; SASSO 60 round or SPIO 60 for installation in the cut-out available as an accessory; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500$ cd/m²; degree of protection IP20; PC2; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Recessed	
black , RAL 9005 ¹	
Reflector chrome	
IP20	
901 lm	
fixture 141 lm/W ²	

LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89	
MR 0.61	
MDER 0.55	

Optical

Reflector	
symmetric	
UGR < 19 , $\geq 65^\circ$ <1500 cd/m ²	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Electrical

non DIM	
220-240 V	
system 8.5 W	
fixture 6.4 W	
22 Vf	
300 mA	
PC2	

Physical

trim	
diameter 165 mm	
height 47 mm	
0.55 kg	

Cutout

diameter 154 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 60 mm	

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



MITA circle 160

trim

074-8122018R 002-91122



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Components

POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
22 W	147-44-22	002-91122



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030

