


# MITA circle 160

trimless

074-8222018R 002-91122



|                |
|----------------|
| Project / Type |
| Notes          |
| Count / Date   |

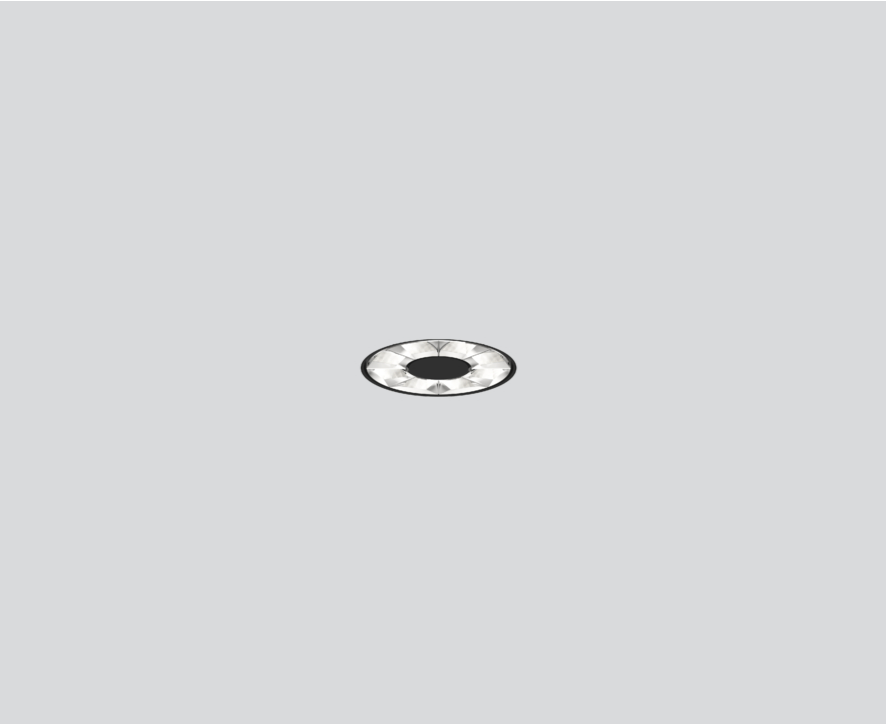

## General

|                              |
|------------------------------|
| Ceiling , Recessed           |
| black , RAL9005 <sup>1</sup> |
| Reflector chrome             |
| IP20                         |
| 901 lm                       |

## LED

|   |
|---|
| 3000 K  |
| CRI ≥ 90  |
| L90 / 50000 h   |
| initial MacAdam ≤ 3 SDCM  |
| R <sub>g</sub> : 99 , R <sub>r</sub> : 91 , R <sub>t(1-15)</sub> : 89 |
| MR 0.61   |
| MDER 0.55   |

## Optical

|   |
|---|
| Reflector                               |
| symmetric                               |
| UGR < 19 , ≥65° <1500 cd/m <sup>2</sup> |
| PstLM ≤ 1.0 <sup>2</sup>                |
| SVM ≤ 0.4 <sup>2</sup>                  |

## Electrical

|                              |
|------------------------------|
| non DIM                      |
| system 8.5 W                 |
| inset 6.4 W                  |
| 22 Vf                        |
| 75 mA                        |
| PC2 220-240V                 |
| system 106 lm/W <sup>3</sup> |
| inset 141 lm/W <sup>4</sup>  |

## Physical

|                 |
|-----------------|
| trimless        |
| diameter 160 mm |
| height 47 mm    |
| 0.8 kg          |


## Cutout

|                                |
|--------------------------------|
| diameter 161 mm                |
| min. ceiling thickness 12.5 mm |
| max. ceiling thickness 25 mm   |
| recessed depth 60 mm           |


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

Ring-shaped light fitting in die-cast aluminium; extremely slim design; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/20/25 mm; surface black powder coated; incl. blind cover made of plastic in the cut-out; SASSO 60 round or SPIO 60 for installation in the cut-out available as an accessory; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m<sup>2</sup>; degree of protection IP20; PC2 220-240V; internal wiring in light halogen free; incl. converter, non dimmable; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator



# MITA circle 160

trimless

074-8222018R 002-91122



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.98   | 0.96   | 0.94   | 0.92   | 0.9    |
| LSF                | 1      | 1      | 1      | 1      | 1      |

MF

MF

LMF<sup>a</sup>

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF<sup>a</sup>

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Components

### POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 22 W | 147-44-22  | 002-91122         |



## Optional electrical accessories

### DIN RAIL LED DRIVER

| TYPE                           | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2   200-1050 mA   2 x 42W | 36-88-59   | 005-6121030       |



### DIN RAIL POWER SUPPLY

| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63   | 005-6520210       |

