


# SETA linear direct / indirect TW power

suspended system  
074-50D9137B



Project / Type \_\_\_\_\_  
Notes \_\_\_\_\_  
Count / Date \_\_\_\_\_

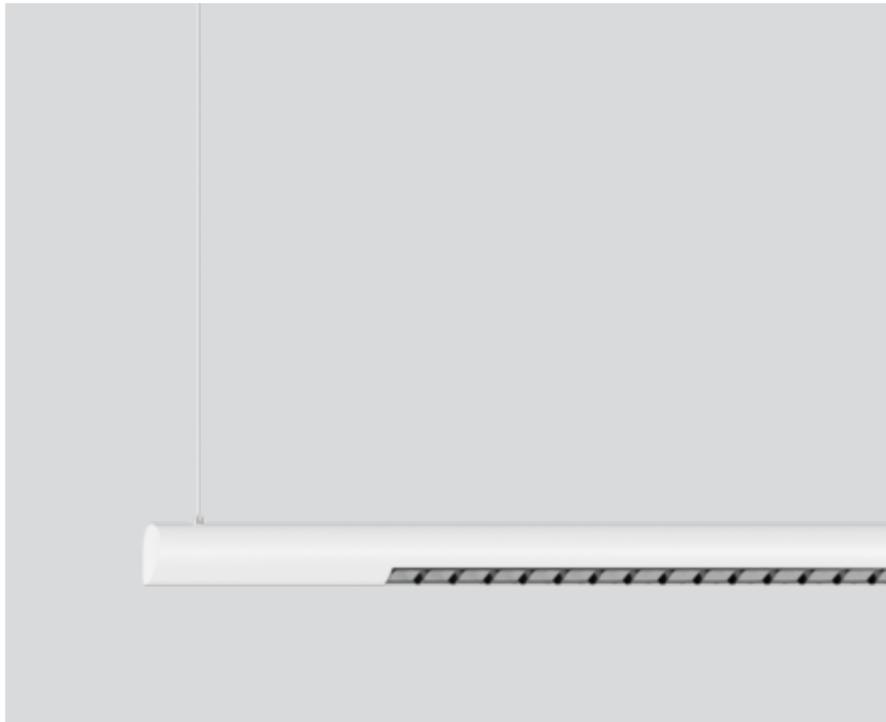

## General

Ceiling , Suspended \_\_\_\_\_  
white , RAL9010 <sup>1</sup> \_\_\_\_\_  
Reflector dark chrome \_\_\_\_\_  
IP20 \_\_\_\_\_  
indirect 6870 lm \_\_\_\_\_  
direct 4590 lm \_\_\_\_\_  
total 11460 lm \_\_\_\_\_

## LED

4000 K \_\_\_\_\_  
CRI ≥ 90 \_\_\_\_\_  
L90 / 50000 h \_\_\_\_\_  
initial MacAdam ≤ 3 SDCM \_\_\_\_\_  
R<sub>g</sub>: 99 , R<sub>r</sub>: 92 , R<sub>t(1-5)</sub>: 90 \_\_\_\_\_  
MR 0.81 \_\_\_\_\_  
MDER 0.74 \_\_\_\_\_

## Optical

Reflector \_\_\_\_\_  
symmetric \_\_\_\_\_  
UGR < 13 , ≥65° <1500 cd/m<sup>2</sup> \_\_\_\_\_  
P<sub>stLM</sub> ≤ 1.0 <sup>2</sup> \_\_\_\_\_  
SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

## Electrical


DALI-2 \_\_\_\_\_  
system 106 W \_\_\_\_\_  
PC1 220-240V \_\_\_\_\_  
system 108 lm/W<sup>3</sup> \_\_\_\_\_  
3 DALI Addr. \_\_\_\_\_

## Physical

length 3400 mm \_\_\_\_\_  
width 60 mm \_\_\_\_\_  
height 60 mm \_\_\_\_\_

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 61 mm) linear; converter integrated into luminaire housing; no visible screws; for lighting systems; surface white powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour direct light component: 4000 K; light colour indirect light component: tunable white diodes (2700-6500 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector dark chrome; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m<sup>2</sup>; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; degree of protection IP20; PC1 220-240V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator



# SETA linear direct / indirect TW power

suspended system  
074-50D9137B



Project / Type \_\_\_\_\_  
Notes \_\_\_\_\_  
Count / Date \_\_\_\_\_

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	5
B13	7
B16	9
B20	11
C10	9
C13	12
C16	15
C20	19

## Mounting accessories

### END CAPS

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
white	60	074-5090017
black	60	074-5090018



## Mounting accessories

### LINEAR CONNECTOR

ARTICLE NUMBER(S)
074-5091110
074-6091120



### CORNER CONNECTOR

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
90°   incl. through wire 5 × 1.5 mm <sup>2</sup>	white	60:250:250	074-5091217
90°   incl. through wire 5 × 1.5 mm <sup>2</sup>	black	60:250:250	074-5091218



# SETA linear direct / indirect TW power

suspended system

074-50D9137B



Project / Type

Notes

Count / Date

## Mounting accessories

### CEILING FASTENER

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic white	67-48-8	050-2041217
jet black	67-48-8	050-2041218



### CABLE SUSPENSION

COLOUR	ARTICLE NUMBER(S)
chrome	005-2152110



### CANOPY / FEEDER CABLE

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
5 x 1,5 mm <sup>2</sup>	pure white	90-90-22	005-2212417
5 x 1,5 mm <sup>2</sup>	jet black	90-90-22	005-2212418



### THROUGH WIRE

TYPE	ARTICLE NUMBER(S)
5 x 1,5 mm <sup>2</sup>   10 pieces	004-90005



## Optical accessories

### BLIND COVER

TYPE	COLOUR	ARTICLE NUMBER(S)
250 mm	white	074-5099107
250 mm	black	074-5099108
500 mm	white	074-5099117
500 mm	black	074-5099118

