

# SETA linear direct

ceiling / suspended system


074-5006038R



Project / Type

Notes

Count / Date

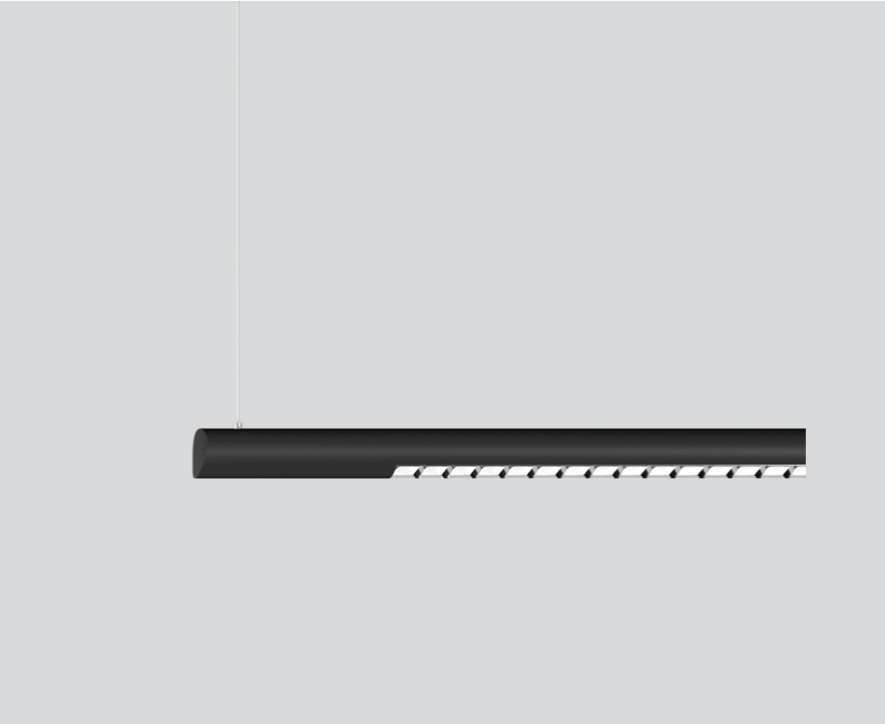

## General

Ceiling , Suspended  
black , RAL9005 <sup>1</sup>  
Reflector chrome  
IP20  
2740 lm

## LED

3000 K  
CRI  $\geq 90$   
L90 / 50000 h  
initial MacAdam  $\leq 3$  SDCM  
 $R_g: 99, R_f: 91, R_{f(1-15)}: 89$   
MR 0.61  
MDER 0.55

## Optical

Reflector  
symmetric  
UGR  $< 19, \geq 65^\circ < 1500 \text{ cd/m}^2$   
PstLM  $\leq 1.0$  <sup>2</sup>  
SVM  $\leq 0.4$  <sup>2</sup>

## Electrical


DALI-2  
system 22.6 W  
PC1 220-240V  
system 121 lm/W<sup>3</sup>  
1 DALI Addr.

## Physical

length 1700 mm  
width 60 mm  
height 60 mm  
2.4 kg

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 61 mm) linear; converter integrated into luminaire housing; no visible screws; for lighting systems; surface black powder coated; for ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR  $\leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500 \text{ cd/m}^2$ ; degree of protection IP20; PC1 220-240V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator

