


# MICROPRISMATIC UGR < 19

MOVE IT PRO

086-6230230 086-6030000P



Project / Type	
Notes	
Count / Date	

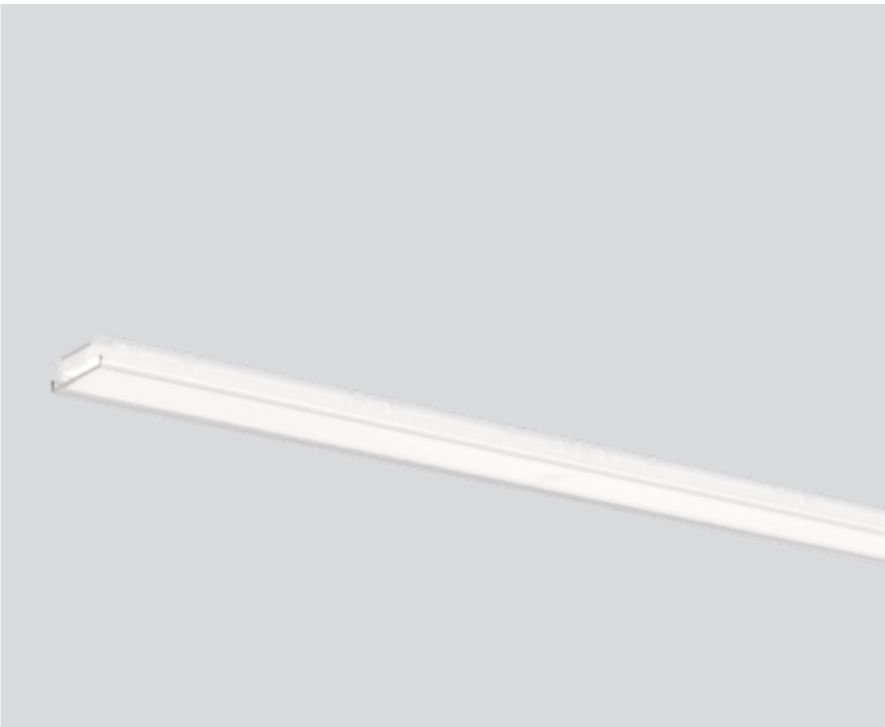

## General

Ceiling , Track	
IP20	
1320 lm	
662 lm/m	

## LED

3500 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 96 , R <sub>f</sub> : 90 , R <sub>(1-15)</sub> : 91	
MR 0.74	
MDER 0.67	

## Optical

Microprismatic	
microprismatic	
UGR < 19 , ≥ 65° < 3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>1</sup>	
SVM ≤ 0.4 <sup>1</sup>	

## Electrical


DALI-2	
220-240 V	
system 14.7 W	
system 90 lm/W <sup>2</sup>	
PC2	
1 DALI Addr.	
7 W/m	

## Physical

length 2000 mm	
width 43 mm	
height 13 mm	

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Light distribution



## Product drawing



## Lighting calculator

