

SASSO 60 round adjustable

trimless

048-2622911S 048-2696117 002-90742



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 30°
 rotation 360°
 black , RAL9005 ¹
 Mounting set traffic white
 front IP40 , back IP20
 441 lm

LED

2700 K
 CRI ≥ 90
 initial MacAdam ≤ 2 SDCM
 R_g: 97 , R_f: 91 , R₍₁₋₁₅₎: 87
 MR 0.52
 MDER 0.47

Optical

spot
 beam angle 12°
 UGR < 13
 P_{stLM} ≤ 1.0 ²
 SVM ≤ 0.4 ²

Electrical

non DIM
 system 10.4 W
 inset 8.8 W
 36 Vf
 250 mA
 PC2 220-240V
 system 42 lm/W³
 inset 50 lm/W⁴

Physical

trimless
 diameter 73 mm
 height 48 mm
 0.22 kg

Cutout

diameter 73 mm
 recessed depth 60 mm


¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)


⁴ incl. optical losses

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 13; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

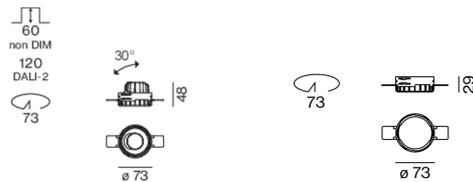

Installation instructions



Lighting calculator

