

SASSO 60 round adjustable

trim 2 lamps

048-2622914S 048-2698318 002-90742



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 30° _____

rotation 360° _____

matt silver _____

Mounting set jet black _____

front IP40 , back IP20 _____

1130 lm _____

LED

2700 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 2 SDCM _____

R_g: 97 , R_f: 91 , R_{1-15}: 87 _____

MR 0.52 _____

MDER 0.47 _____

Optical

spot _____

beam angle 12° _____

UGR < 16 , ≥65° <1500 cd/m² _____

PstLM ≤ 1.0 ¹ _____

SVM ≤ 0.4 ¹ _____

Electrical

non DIM _____

20.8 W _____

inset 8.8 W _____

36 Vf _____

250 mA _____

total insets 17.7 W _____

PC2 220-240V _____

54 lm/W _____

inset 64 lm/W _____

Physical

trim _____

length 147 mm _____

width 80 mm _____

height 48 mm _____

0.28 kg _____

Cutout

diameter 70 mm _____

length 70 mm _____

width 136 mm _____


min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____


recessed depth 90 mm _____

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable and 30° tilttable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

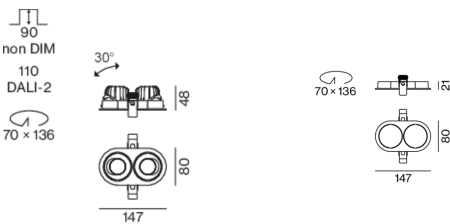

¹ Value of containing product at full load (undimmed)



SASSO 60 round adjustable

trim 2 lamps

048-2622914S 048-2698318 002-90742



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



SASSO 60 round adjustable

trim 2 lamps
048-2622914S 048-2698318 002-90742



Project / Type

Notes

Count / Date

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	57
B13	75
B16	92
B20	115
C10	57
C13	75
C16	92
C20	115

Components

MOUNTING SET with trim 2 lamps

TYPE for intermediate ceilings	COLOUR jet black	L·W·H (MM) 147-80-21	ARTICLE NUMBER(S) 048-2698318
-----------------------------------	---------------------	-------------------------	----------------------------------

POWER SUPPLY

TYPE 10 W	L·W·H (MM) 65-39-20	ARTICLE NUMBER(S) 002-90742
--------------	------------------------	--------------------------------

Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR white aluminium	L·W·H (MM) 614-307-120	ARTICLE NUMBER(S) 048-2695110
---------------------------	---------------------------	----------------------------------

Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE 160 W	L·W·H (MM) 72-90-63	ARTICLE NUMBER(S) 005-6520210
---------------	------------------------	----------------------------------

DIN RAIL LED DRIVER

TYPE DALI-2 200-1050 mA 2 x 42W	L·W·H (MM) 36-88-59	ARTICLE NUMBER(S) 005-6121030
--	------------------------	----------------------------------

