

# SASSO 60 round adjustable

trim

048-2622019M 048-269631G 002-90742




|                |
|----------------|
| Project / Type |
| Notes          |
| Count / Date   |




Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 27° beam; UGR  $\leq 16$ ; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

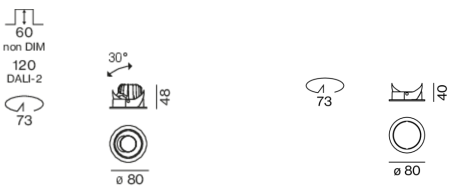

## General

|                               |
|-------------------------------|
| Ceiling , Recessed            |
| tilt max 30°                  |
| rotation 360°                 |
| gold , RAL 260-M <sup>1</sup> |
| Mounting set white aluminium  |
| front IP40 , back IP20        |
| 1020 lm                       |
| fixture 96 lm/W <sup>2</sup>  |

## LED

|   |
|---|
| 3000 K  |
| CRI $\geq 90$   |
| L80 / 50000 h   |
| initial MacAdam $\leq 2$ SDCM   |
| R <sub>g</sub> : 99 , R <sub>f</sub> : 90 , R <sub>t(1-15)</sub> : 87 |
| MR 0.6  |
| MDER 0.54   |

## Optical

|                               |
|-------------------------------|
| medium                        |
| beam angle 27°                |
| UGR $< 16$                    |
| PstLM $\leq 1.0$ <sup>3</sup> |
| SVM $\leq 0.4$ <sup>3</sup>   |

## Electrical

|                |
|----------------|
| non DIM        |
| 220-240 V      |
| system 12.5 W  |
| fixture 10.6 W |
| 36 Vf          |
| 300 mA         |
| PC2            |

## Physical

|                |
|----------------|
| trim           |
| diameter 80 mm |
| height 48 mm   |
| 0.2 kg         |

## Cutout

|                              |
|------------------------------|
| diameter 73 mm               |
| min. ceiling thickness 2 mm  |
| max. ceiling thickness 25 mm |
| recessed depth 60 mm         |

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)





# SASSO 60 round adjustable

trim

048-2622019M 048-269631G 002-90742



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

