

# SASSO 60 round adjustable

trim 2 lamps

048-2622017S 048-2698318 002-90742



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



**General**

Ceiling , Recessed \_\_\_\_\_

tilt max 30° \_\_\_\_\_

rotation 360° \_\_\_\_\_

white , RAL9016 <sup>1</sup> \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

front IP40 , back IP20 \_\_\_\_\_

1110 lm \_\_\_\_\_

**LED**

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 87 \_\_\_\_\_

MR 0.6 \_\_\_\_\_

MDER 0.54 \_\_\_\_\_

**Optical**

spot \_\_\_\_\_

beam angle 11° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 11° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

**Electrical**

non DIM \_\_\_\_\_

system 20.8 W \_\_\_\_\_

inset 8.8 W \_\_\_\_\_

36 V<sub>f</sub> \_\_\_\_\_

250 mA \_\_\_\_\_


total insets 17.7 W \_\_\_\_\_

PC2 220-240V \_\_\_\_\_


system 53 lm/W<sup>3</sup> \_\_\_\_\_

inset 63 lm/W<sup>4</sup> \_\_\_\_\_

## Light distribution



## Product drawing

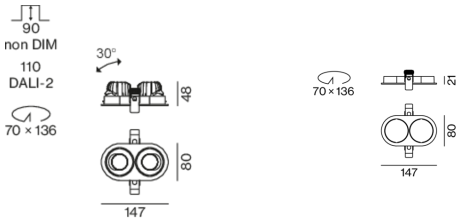

**Physical**

trim \_\_\_\_\_

length 147 mm \_\_\_\_\_

width 80 mm \_\_\_\_\_

height 48 mm \_\_\_\_\_

0.28 kg \_\_\_\_\_

**Cutout**

diameter 70 mm \_\_\_\_\_

length 70 mm \_\_\_\_\_

width 136 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 90 mm \_\_\_\_\_

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# SASSO 60 round adjustable

trim 2 lamps

048-2622017S 048-2698318 002-90742



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



# SASSO 60 round adjustable

trim 2 lamps  
048-2622017S 048-2698318 002-90742



Project / Type

Notes

Count / Date

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 57                 |
| B13                            | 75                 |
| B16                            | 92                 |
| B20                            | 115                |
| C10                            | 57                 |
| C13                            | 75                 |
| C16                            | 92                 |
| C20                            | 115                |

## Components

### MOUNTING SET with trim 2 lamps

|                                   |                     |                         |                                  |
|-----------------------------------|---------------------|-------------------------|----------------------------------|
| TYPE<br>for intermediate ceilings | COLOUR<br>jet black | L·W·H (MM)<br>147-80-21 | ARTICLE NUMBER(S)<br>048-2698318 |
|-----------------------------------|---------------------|-------------------------|----------------------------------|

### POWER SUPPLY

|              |                        |                                |
|--------------|------------------------|--------------------------------|
| TYPE<br>10 W | L·W·H (MM)<br>65-39-20 | ARTICLE NUMBER(S)<br>002-90742 |
|--------------|------------------------|--------------------------------|

## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

|                           |                           |                                  |
|---------------------------|---------------------------|----------------------------------|
| COLOUR<br>white aluminium | L·W·H (MM)<br>614-307-120 | ARTICLE NUMBER(S)<br>048-2695110 |
|---------------------------|---------------------------|----------------------------------|

## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|               |                        |                                  |
|---------------|------------------------|----------------------------------|
| TYPE<br>160 W | L·W·H (MM)<br>72-90-63 | ARTICLE NUMBER(S)<br>005-6520210 |
|---------------|------------------------|----------------------------------|

### DIN RAIL LED DRIVER

|  |                        |                                  |
|--|------------------------|----------------------------------|
| TYPE<br>DALI-2   200-1050 mA   2 x 42W | L·W·H (MM)<br>36-88-59 | ARTICLE NUMBER(S)<br>005-6121030 |
|--|------------------------|----------------------------------|

