

# SASSO 60 square downlight

trim 2 lamps

048-2612917F 048-269931G 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set white aluminium

front IP44 , back IP20

1780 lm

## LED

2700 K

CRI  $\geq$  90

L80 / 50000 h

initial MacAdam  $\leq$  2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 87

MR 0.52

MDER 0.47

## Optical

flood

beam angle 44°

UGR < 19

PstLM  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

non DIM

220-240 V

system 20.5 W

inset 8.7 W

36 Vf

250 mA

total insets 17.4 W

PC2

system 87 lm/W<sup>3</sup>

inset 103 lm/W<sup>3</sup>

## Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.28 kg

## Cutout

length 138 mm

width 73 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 90 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Light distribution



## Product drawing

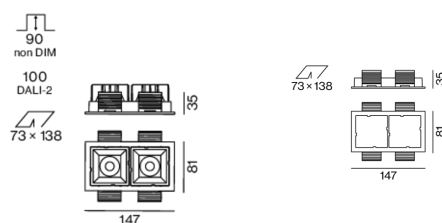

# SASSO 60 square downlight

trim 2 lamps

048-2612917F 048-269931G 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

