

# SASSO 60 square downlight

trim

048-2612217S 048-2697318 002-90742



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set jet black

front IP44 , back IP20

595 lm

### LED

3500 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 87

MR 0.6

MDER 0.54

### Optical

spot

beam angle 12°

UGR < 19

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

system 10.4 W

inset 8.8 W

36 Vf

250 mA

PC2 220-240V

system 57 lm/W<sup>3</sup>

inset 67 lm/W<sup>4</sup>

### Physical

trim

length 80 mm

width 80 mm

height 48 mm

0.23 kg

### Cutout

length 73 mm


width 73 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 60 mm

### Light distribution



### Product drawing

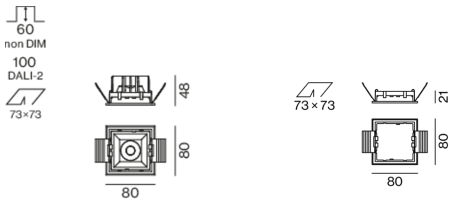

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

