

SASSO 60 square downlight

trim

048-2612219W 048-2697318 002-90742



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

gold , RAL 260-M ¹

Mounting set jet black

front IP44 , back IP20

1070 lm

fixture 100 lm/W²

LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 90 , R_{t(1-15)}: 89

MR 0.7

MDER 0.64

Optical

wide flood

beam angle 57°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

non DIM

220-240 V

system 12.5 W

fixture 10.6 W

36 Vf

300 mA

PC2

Physical

trim

length 80 mm

width 80 mm

height 48 mm

0.22 kg

Cutout

length 73 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 60 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 57° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

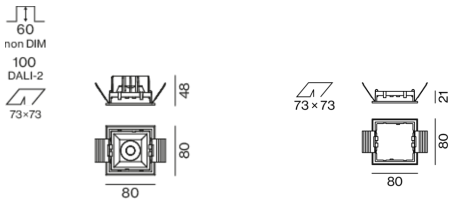

SASSO 60 square downlight

trim

048-2612219W 048-2697318 002-90742



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SASSO 60 square downlight

trim

048-2612219W 048-2697318 002-90742



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 43 |
| B13 | 55 |
| B16 | 68 |
| B20 | 85 |
| C10 | 72 |
| C13 | 94 |
| C16 | 116 |
| C20 | 145 |

Components

MOUNTING SET with trim 1 lamp

| | | | |
|-----------------------------------|---------------------|------------------------|----------------------------------|
| TYPE for intermediate ceilings | COLOUR jet black | L-W-H (MM) 80-80-21 | ARTICLE NUMBER(S) 048-2697318 |
|-----------------------------------|---------------------|------------------------|----------------------------------|



POWER SUPPLY

| | | |
|--------------|------------------------|--------------------------------|
| TYPE 10 W | L-W-H (MM) 65-39-20 | ARTICLE NUMBER(S) 002-90742 |
|--------------|------------------------|--------------------------------|



Mounting accessories

THROUGH WIRING CONNECTION BOX

| | | |
|--|-------------------------|----------------------------------|
| TYPE non DIM cable ø 4 – 12 mm, Linect®-Ready | L-W-H (MM) 105-58-30 | ARTICLE NUMBER(S) 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| | | |
|---------------------------|---------------------------|----------------------------------|
| COLOUR white aluminium | L-W-H (MM) 614-307-120 | ARTICLE NUMBER(S) 048-2695110 |
|---------------------------|---------------------------|----------------------------------|



Optional electrical accessories

DIN RAIL POWER SUPPLY

| | | |
|---------------|------------------------|----------------------------------|
| TYPE 160 W | L-W-H (MM) 72-90-63 | ARTICLE NUMBER(S) 005-6520210 |
|---------------|------------------------|----------------------------------|



DIN RAIL LED DRIVER

| | | |
|--|------------------------|----------------------------------|
| TYPE DALI-2 200-1050 mA 2 x 42W | L-W-H (MM) 36-88-59 | ARTICLE NUMBER(S) 005-6121030 |
|--|------------------------|----------------------------------|

