

# SASSO 60 square downlight

trim

048-2612211M 048-2697317 002-90742



Project / Type


Notes

Count / Date




Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 27° beam; UGR  $\leq 16$ ; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

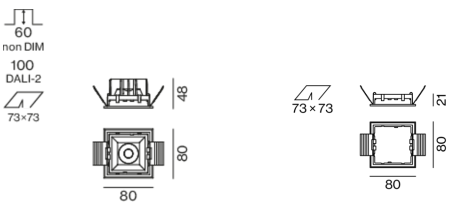

## General

Ceiling , Recessed  
black , RAL 9005 <sup>1</sup>  
Mounting set traffic white  
front IP44 , back IP20  
1030 lm  
fixture 97 lm/W<sup>2</sup>

## LED

3500 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 89  
MR 0.7  
MDER 0.64

## Optical

medium  
beam angle 27°  
UGR  $\leq 16$   
P<sub>stLM</sub>  $\leq 1.0$  <sup>3</sup>  
SVM  $\leq 0.4$  <sup>3</sup>

## Electrical

non DIM  
220-240 V  
system 12.5 W  
fixture 10.6 W  
36 Vf  
300 mA  
PC2

## Physical

trim  
length 80 mm  
width 80 mm  
height 48 mm  
0.24 kg

## Cutout

length 73 mm  
width 73 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 60 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 square downlight

trim

048-2612211M 048-2697317 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

