

SASSO 60 square downlight

trim 2 lamps

048-2612117S 048-2699317 002-90742



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

white , RAL9016 ¹ _____

Mounting set traffic white _____

front IP44 , back IP20 _____

1230 lm _____

LED

4000 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

spot _____

beam angle 12° _____

UGR < 19 _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

non DIM _____

220-240 V _____

system 20.8 W _____

inset 8.8 W _____

36 V_f _____

250 mA _____

total insets 17.7 W _____

PC2 _____

system 59 lm/W³ _____

inset 69 lm/W³ _____

Physical

trim _____

length 147 mm _____

width 81 mm _____

height 48 mm _____

0.28 kg _____

Cutout

length 138 mm _____

width 73 mm _____


min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____


recessed depth 90 mm _____

Recessed square spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 19; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

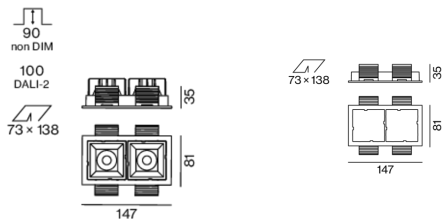

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

SASSO 60 square downlight

trim 2 lamps

048-2612117S 048-2699317 002-90742



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

