

# SASSO 60 square downlight

trim 2 lamps


048-2612119S 048-269931G 002-90742



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

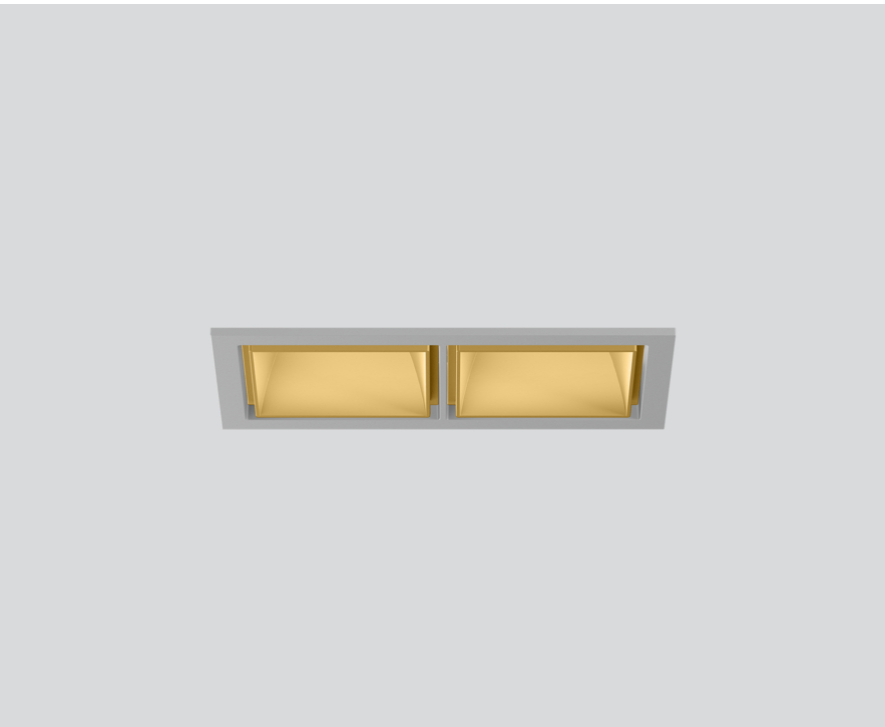

## General

Ceiling , Recessed \_\_\_\_\_

gold , RAL 260-M<sup>1</sup> \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

1870 lm \_\_\_\_\_

fixture 86 lm/W<sup>2</sup> \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88 \_\_\_\_\_

MR 0.8 \_\_\_\_\_

MDER 0.72 \_\_\_\_\_

## Optical

spot \_\_\_\_\_

beam angle 15° \_\_\_\_\_

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

PstLM ≤ 1.0<sup>3</sup> \_\_\_\_\_

SVM ≤ 0.4<sup>3</sup> \_\_\_\_\_

Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 25.5 W \_\_\_\_\_

fixture 10.9 W \_\_\_\_\_


36 Vf \_\_\_\_\_

300 mA \_\_\_\_\_


fixture 21.7 W \_\_\_\_\_

PC2 \_\_\_\_\_

## Light distribution



## Product drawing

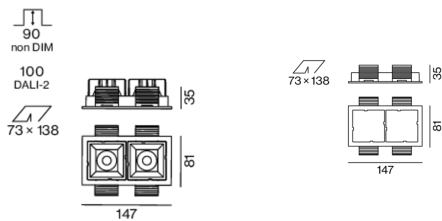

## Physical

trim \_\_\_\_\_

length 147 mm \_\_\_\_\_

width 81 mm \_\_\_\_\_

height 48 mm \_\_\_\_\_

0.28 kg \_\_\_\_\_

## Cutout

length 138 mm \_\_\_\_\_

width 73 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 90 mm \_\_\_\_\_

<sup>1</sup> RAL code

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 square downlight

trim 2 lamps

048-2612119S 048-269931G 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

