

SASSO 60 square downlight

trim

048-2612119S 048-2697318 002-90742



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

gold , RAL 260-M ¹ _____

Mounting set jet black _____

front IP44 , back IP20 _____

935 lm _____

fixture 86 lm/W² _____

LED

4000 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

spot _____

beam angle 15° _____

UGR < 16 , ≥65° <3000 cd/m² _____

PstLM ≤ 1.0 ³ _____

SVM ≤ 0.4 ³ _____

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

non DIM _____

220-240 V _____

system 12.8 W _____


fixture 10.9 W _____

36 Vf _____


300 mA _____

PC2 _____

Light distribution



Product drawing

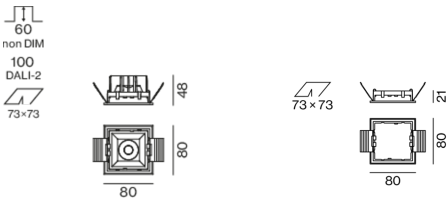

Physical

trim _____

length 80 mm _____

width 80 mm _____

height 48 mm _____

0.23 kg _____

Cutout

length 73 mm _____

width 73 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 60 mm _____

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)



SASSO 60 square downlight

trim

048-2612119S 048-2697318 002-90742



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

