

# SASSO 60 square downlight

trim 2 lamps

048-2612019S 048-2699317 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

gold , RAL 260-M<sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

1780 lm

fixture 82 lm/W<sup>2</sup>

## LED

3000 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 87

MR 0.6

MDER 0.54

## Optical

spot

beam angle 15°

UGR ≤ 16 , ≥65° <1500 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>3</sup>

SVM ≤ 0.4<sup>3</sup>

## Electrical

non DIM

220-240 V

system 25.5 W

fixture 10.9 W

36 Vf

300 mA

fixture 21.7 W

PC2

## Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.28 kg

## Cutout

length 138 mm

width 73 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 90 mm

<sup>1</sup> RAL code


<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

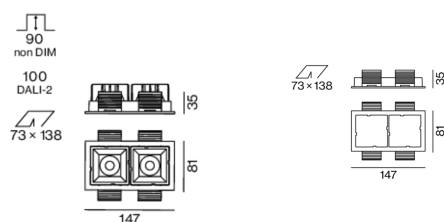

# SASSO 60 square downlight

trim 2 lamps

048-2612019S 048-2699317 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

