

# SASSO 60 square downlight

trim 2 lamps


048-2612019S 048-2699317 002-90742



Project / Type

Notes

Count / Date

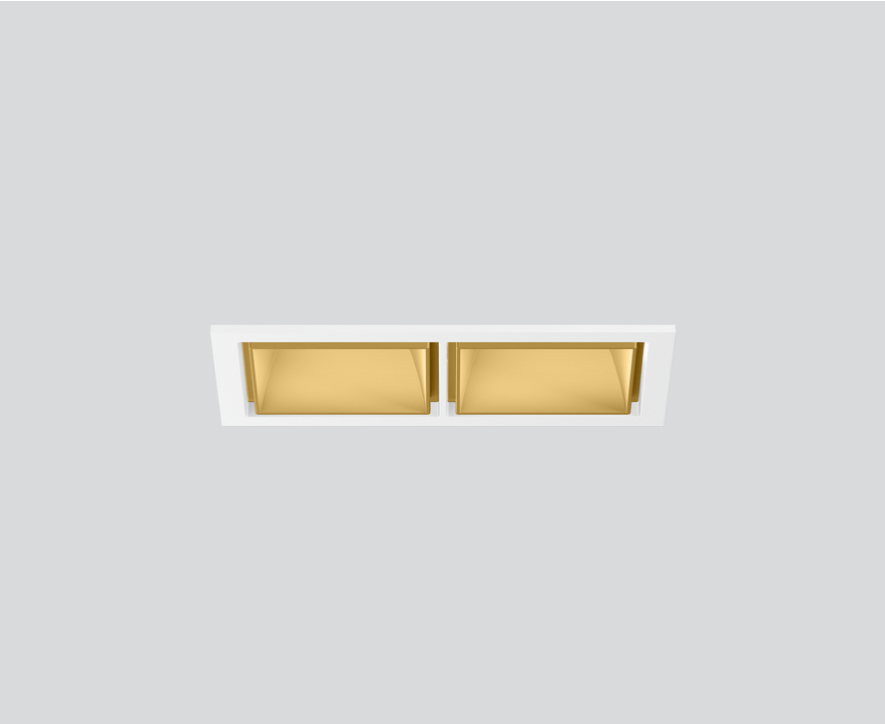

### General

Ceiling , Recessed

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

1060 lm

### LED

3000 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 87

MR 0.6

MDER 0.54

### Optical

spot

beam angle 12°

UGR < 16 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

system 20.8 W

inset 8.8 W

36 Vf

250 mA

total insets 17.7 W

PC2 220-240V

system 51 lm/W<sup>3</sup>

inset 60 lm/W<sup>4</sup>

### Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.28 kg

### Cutout

length 138 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 90 mm

Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

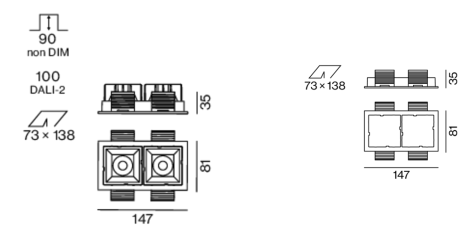

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# SASSO 60 square downlight

trim 2 lamps

048-2612019S 048-2699317 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

