

SASSO 60 square downlight

trim

048-2612017S 048-2697317 002-90742



Project / Type	
Notes	
Count / Date	



--	--	--	--

General
Ceiling , Recessed
white , RAL 9016 ¹
Mounting set traffic white
front IP44 , back IP20
914 lm
fixture 84 lm/W ²

LED
3000 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _r : 90 , R _{t(1-15)} : 87
MR 0.6
MDER 0.54


Optical
spot
beam angle 15°
UGR ≤ 19
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical
non DIM
220-240 V
system 12.8 W
fixture 10.9 W
36 Vf
300 mA
PC2


Physical
trim
length 80 mm
width 80 mm
height 48 mm
0.24 kg

Cutout
length 73 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm

Light distribution



Product drawing

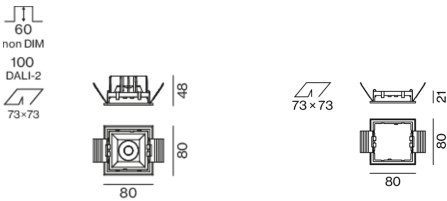

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator





Project / Type

Notes

Count / Date

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	43
B13	55
B16	68
B20	85
C10	72
C13	94
C16	116
C20	145

Components

MOUNTING SET with trim 1 lamp

TYPE for intermediate ceilings	COLOUR traffic white	L-W-H (MM) 80-80-21	ARTICLE NUMBER(S) 048-2697317
-----------------------------------	-------------------------	------------------------	----------------------------------



POWER SUPPLY

TYPE 10 W	L-W-H (MM) 65-39-20	ARTICLE NUMBER(S) 002-90742
--------------	------------------------	--------------------------------



Mounting accessories

THROUGH WIRING CONNECTION BOX

TYPE non DIM cable ø 4 – 12 mm, Linect®-Ready DALI cable ø 4 – 12 mm, Linect®-Ready	L-W-H (MM) 105-58-30 105-58-30	ARTICLE NUMBER(S) 005-2531110 005-2551110
---	--------------------------------------	---



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR white aluminium	L-W-H (MM) 614-307-120	ARTICLE NUMBER(S) 048-2695110
---------------------------	---------------------------	----------------------------------



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE 160 W	L-W-H (MM) 72-90-63	ARTICLE NUMBER(S) 005-6520210
---------------	------------------------	----------------------------------



DIN RAIL LED DRIVER

TYPE DALI-2 200-1050 mA 2 x 42W	L-W-H (MM) 36-88-59	ARTICLE NUMBER(S) 005-6121030
--	------------------------	----------------------------------

