SASSO 60 round downlight

trim 2 lamps

048-2602917S 048-269831G 002-90742

Project / Type

Notes

Count / Date

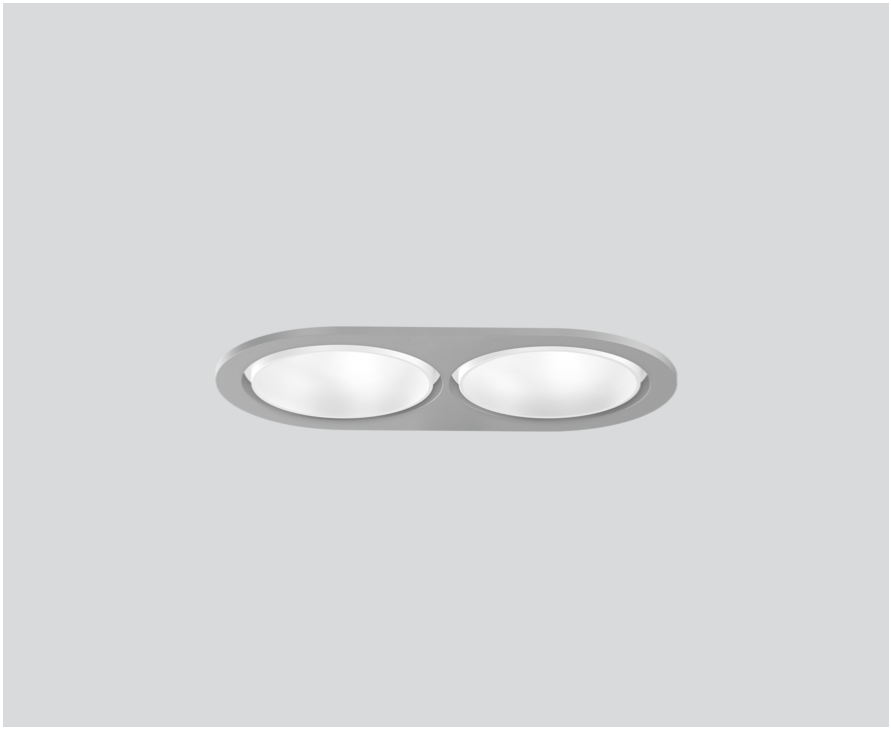

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 19; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

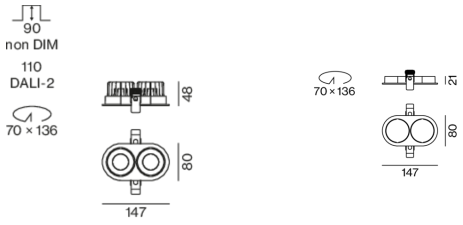

General

Ceiling , Recessed
rotation 360°
white , RAL 9016 [1]
Mounting set white aluminium
front IP44 , back IP20
1790 lm
fixture 83 lm/W[2]

LED

2700 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
R_g: 97 , R_f: 91 , R_{f1-15}: 87
MR 0.52
MDER 0.47

Optical

spot
beam angle 15°
UGR ≤ 19
PstLM ≤ 1.0 [3]
SVM ≤ 0.4 [3]

Electrical

non DIM
220-240 V
system 25.5 W
fixture 10.9 W
36 Vf
300 mA
fixture 21.7 W
PC2

Physical

trim
length 147 mm
width 80 mm
height 48 mm
0.28 kg

Cutout

diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 90 mm

[1] RAL code
[2] incl. consideration of optical losses & internal control unit losses
[3] Value of containing product at full load (undimmed)

['048-2602917S 048-269831G 002-90742'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

SASSO 60 round downlight

trim 2 lamps

048-2602917S 048-269831G 002-90742

Project / Type

Notes

Count / Date

Installation instructions

Lighting calculator

['048-2602917S 048-269831G 002-90742'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com