

# SASSO 60 round downlight

trim 2 lamps

048-2602019F 048-2698318 002-90742




Project / Type
Notes
Count / Date




Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 41° beam; UGR  $\leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 3000$  cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

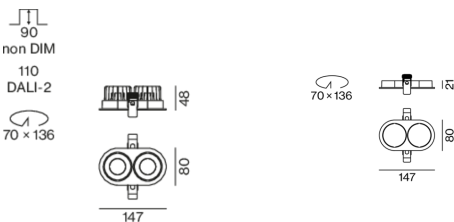

## General

Ceiling , Recessed
rotation 360°
gold , RAL260-M <sup>1</sup>
Mounting set jet black
front IP44 , back IP20
1710 lm

## LED

3000 K
CRI $\geq 90$
L80 / 50000 h
initial MacAdam $\leq 2$ SDCM
R <sub>g</sub> : 99 , R <sub>f</sub> : 90 , R <sub>t(1-15)</sub> : 87
MR 0.6
MDER 0.54

## Optical

flood
beam angle 41°
UGR $< 19$ , $\geq 65^\circ < 3000$ cd/m <sup>2</sup>
P <sub>stLM</sub> $\leq 1.0$ <sup>2</sup>
SVM $\leq 0.4$ <sup>2</sup>

## Electrical

non DIM
system 20.5 W
inset 8.7 W
36 Vf
250 mA
total insets 17.4 W
PC2 220-240V
system 83 lm/W <sup>3</sup>
inset 98 lm/W <sup>4</sup>

## Physical

trim
length 147 mm
width 80 mm
height 48 mm
0.28 kg

## Cutout

diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 90 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses



# SASSO 60 round downlight

trim 2 lamps

048-2602019F 048-2698318 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

