

FRAME 40 reflector

trim


042-7113037R



Project / Type

Notes

Count / Date

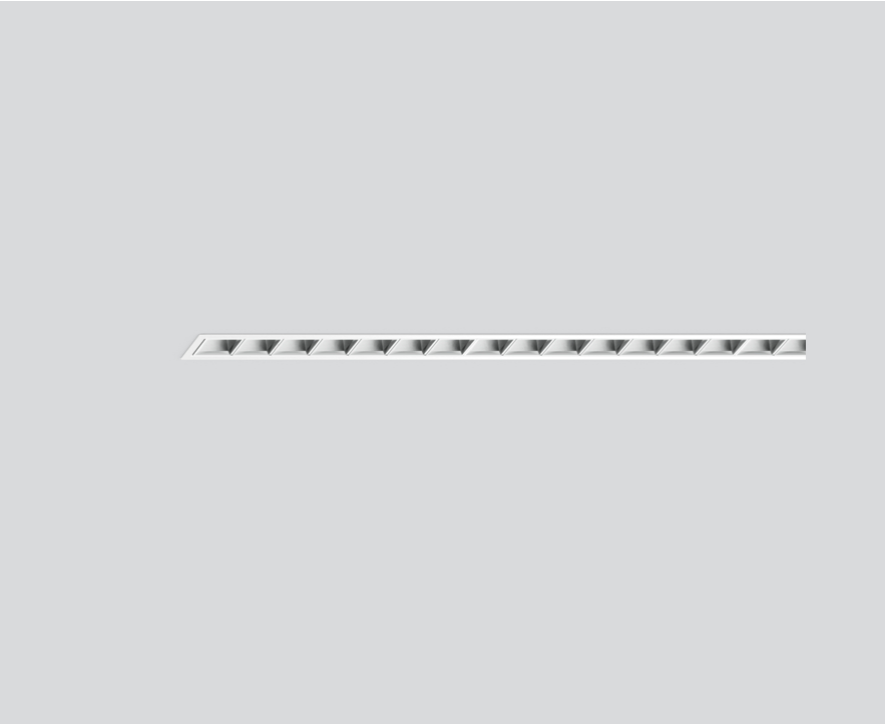

220-240V

X-PERT

UGR
≤ 19

cd/m²
≤ 1500

CRI
≥ 90

X-PERT

General

Ceiling , Recessed

traffic white , RAL9016 ¹

Reflector chrome

3020 lm/m

IP20

4510 lm

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.61

MDER 0.55

Optical

Reflector

Symmetric

UGR < 19 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

36 W

PC1 220-240V

125 lm/W

24 W/m

Physical

length 1519 mm

width 55 mm

height 60 mm

Cutout

length 1509 mm

width 45 mm


min. ceiling thickness 8 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

